


Surface Mount Power Splitter/Combiner

2 Way-90° 50Ω 800 to 900 MHz

QBA-12N+
QBA-12N




Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Permanent damage may occur if any of these limits are exceeded.	


Pin Connections

SUM PORT	1
PORT 1 (+90°)	10
PORT 2 (0°)	6
GROUND	2,3,4,7,8,9
50 OHM TERM EXTERNAL	5

Outline Drawing



PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002
ADJACENT GROUND PINS SHALL BE CONNECTED
TO EACH OTHER AND TO GROUND PAD

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	
.250	.300	.050	.310	.050	.015	.050	.066	
6.35	7.62	1.27	7.87	1.27	0.38	1.27	1.68	
J	K	L	M	N	P	Q	R	wt
.030	.095	.330	.100	.020	.015	.070	.014	grams
0.76	2.41	8.38	2.54	0.51	0.38	1.78	0.36	0.2

Demo Board MCL P/N: TB-115+ Suggested PCB Layout (PL-004)

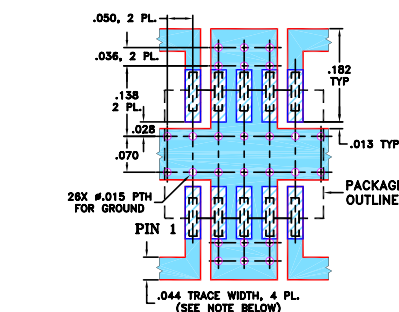

NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020 ± .0015; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- low insertion loss, 0.25 dB typ.
- high power capability, 50W
- high isolation, 28 dB typ.
- ceramic body, good for heat dissipation
- solder plated leads for excellent solderability
- aqueous washable
- protected by U.S. Patent 5,534,830

Applications

- cellular
- digital cordless phones

Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)	INSERTION LOSS ¹ (dB) Avg. of Coupled Outputs ABOVE 3 dB	PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)	INPUT POWER ² (W)
f_L - f_U	Typ. Min.	$\bar{X}$ $\bar{X}$ σ	Max.	Max.	below 25°C
800-900	28 20	0.25 0.30 0.02	3.0	1.0	50

1. Includes test fixture losses.




2. Derate linearly to 10W at 100°C

Thermal compound may be applied to decrease body temperature. See application note AN-10-007


Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)	Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2					
800.00	3.62	2.93	0.70	27.63	1.08	1.21	1.09
825.00	3.54	3.00	0.54	27.27	1.08	1.21	1.09
850.00	3.46	3.05	0.40	26.77	1.08	1.22	1.09
875.00	3.43	3.07	0.36	26.21	1.08	1.23	1.09
900.00	3.45	3.16	0.28	25.57	1.09	1.24	1.10
925.00	3.37	3.21	0.16	24.92	1.09	1.25	1.10
950.00	3.29	3.21	0.09	24.23	1.11	1.26	1.11
1000.00	3.37	3.31	0.06	22.89	1.13	1.28	1.13
1025.00	3.34	3.33	0.01	22.20	1.15	1.29	1.15
1050.00	3.29	3.31	0.03	21.50	1.17	1.30	1.16
1075.00	3.34	3.33	0.01	20.87	1.19	1.31	1.17
1100.00	3.41	3.38	0.03	20.29	1.21	1.32	1.19
1150.00	3.43	3.34	0.09	19.04	1.26	1.35	1.23
1175.00	3.48	3.36	0.12	18.46	1.28	1.36	1.25
1200.00	3.57	3.37	0.20	17.96	1.31	1.37	1.27

1. Total Loss = Insertion Loss + 3dB splitter loss.

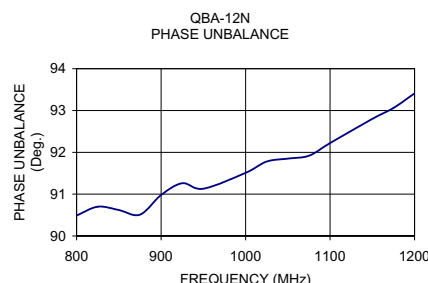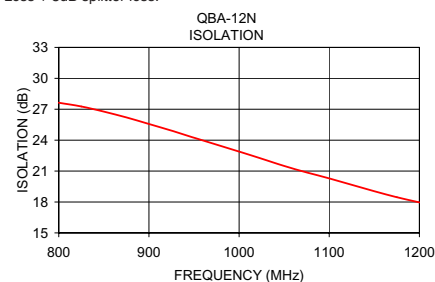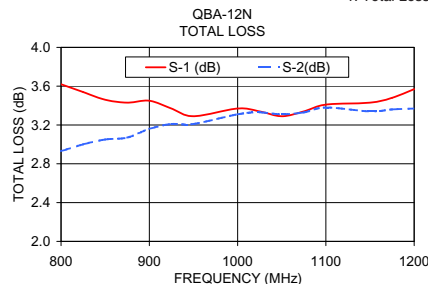

electrical schematic



For detailed performance specs & shopping online see web site

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine www.minicircuits.com Provides ACTUAL Data Instantly at www.minicircuits.com
IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. C
M127604
EDB991005
QBA-12
WZ/BC/CP
100622