

Surface Mount Power Splitter/Combiner

LRPS-3-1J+ LRPS-3-1J

3 Way-0° 50Ω 10 to 300 MHz



Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.375W max.

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

SUM PORT	6
PORT 1	1
PORT 2	2
PORT 3	3
GROUND	4,5

Outline Drawing

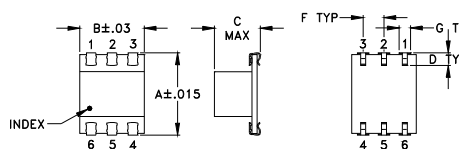

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.390	.31	.225	.060	--	.100	.045
9.91	7.87	5.72	1.52	--	2.54	1.14
H	J	K	L	M	wt	
.420	.120	.060	.100	--	grams	
10.67	3.05	1.52	2.54	--	0.50	

Demo Board MCL P/N: TB-225 Suggested PCB Layout (PL-170)

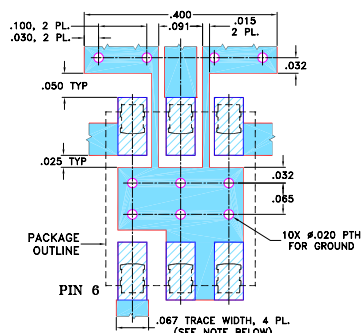

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- low insertion loss, 0.3 dB typ.
- good isolation, 25 dB typ.
- aqueous washable
- J-leads for strain relief & excellent solderability

Applications

- VHF
- defense & federal communications

CASE STYLE: QQQ569
PRICE: \$19.95 ea. QTY. (1-9)

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Electrical Specifications




FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 4.8 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L	M	U	L	M	U
	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
10-300	25	20	25	20	25	20	0.2	0.6	0.3	0.8	0.5	1.2	2	3	4	0.1	0.3	0.7

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]


Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)			Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3
	S-1	S-2	S-3		1-2	1-3	2-3					
10.00	5.09	5.10	5.10	0.01	25.23	25.70	25.35	0.12	1.29	1.08	1.09	1.08
20.00	5.09	5.10	5.10	0.01	25.12	25.56	25.20	0.21	1.27	1.06	1.07	1.07
30.00	5.09	5.10	5.10	0.01	24.91	25.32	24.94	0.31	1.26	1.06	1.06	1.06
45.00	5.09	5.10	5.10	0.01	24.63	25.03	24.63	0.42	1.25	1.05	1.06	1.06
60.00	5.10	5.12	5.11	0.01	24.44	24.82	24.38	0.58	1.25	1.05	1.06	1.06
75.00	5.12	5.13	5.13	0.01	24.26	24.64	24.15	0.69	1.25	1.05	1.05	1.06
90.00	5.13	5.14	5.14	0.01	24.12	24.53	23.97	0.82	1.24	1.05	1.05	1.06
110.00	5.15	5.17	5.17	0.01	23.97	24.38	23.75	1.00	1.24	1.05	1.05	1.06
140.00	5.20	5.21	5.21	0.02	23.85	24.26	23.52	1.18	1.23	1.05	1.05	1.06
180.00	5.26	5.28	5.27	0.02	23.91	24.29	23.41	1.48	1.21	1.04	1.04	1.06
210.00	5.31	5.33	5.31	0.02	24.17	24.50	23.53	1.70	1.19	1.04	1.04	1.06
240.00	5.37	5.40	5.38	0.03	24.72	24.91	23.89	1.84	1.16	1.05	1.04	1.06
270.00	5.44	5.47	5.44	0.03	25.65	25.60	24.56	2.00	1.12	1.06	1.05	1.06
290.00	5.49	5.52	5.49	0.03	26.59	26.28	25.26	2.06	1.10	1.07	1.05	1.06
300.00	5.53	5.55	5.52	0.04	27.22	26.71	25.71	2.09	1.09	1.07	1.06	1.06

1. Total Loss = Insertion Loss + 4.8dB splitter loss.

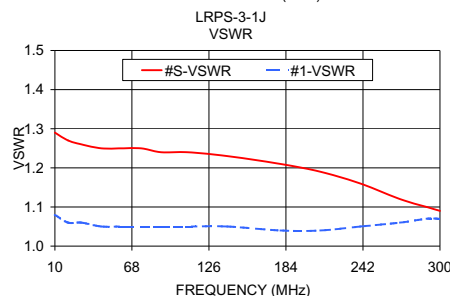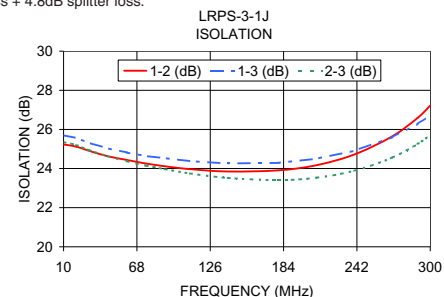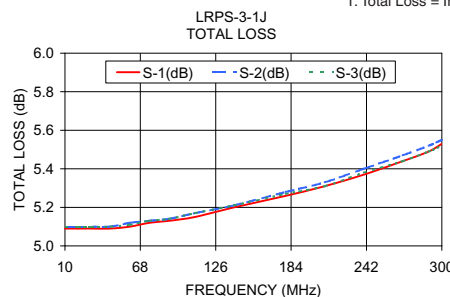

electrical schematic

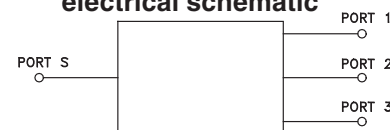

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. C
M127604
LRPS-3-1J
D.J./D/CP/AM
100616