



MECHANICAL DATA

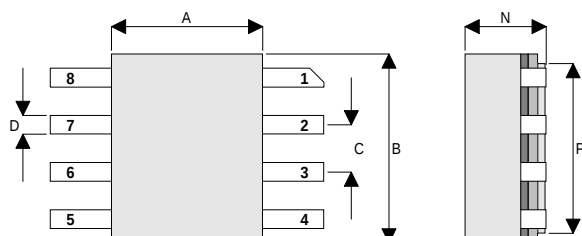

GOLD METALLISED MULTI-PURPOSE SILICON DMOS RF FET 5W – 12.5V – 1GHz PUSH-PULL

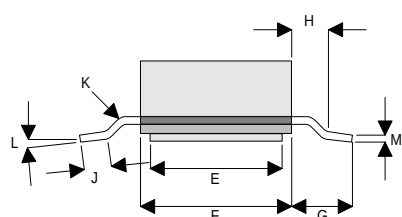

SO8 PACKAGE

PIN 1 – SOURCE
PIN 2 – DRAIN 1
PIN 3 – DRAIN 2
PIN 4 – SOURCE
PIN 5 – SOURCE
PIN 6 – GATE 2
PIN 7 – GATE 1
PIN 8 – SOURCE

Dim.	mm	Tol.	Inches	Tol.
A	4.06	±0.08	0.160	±0.003
B	5.08	±0.08	0.200	±0.003
C	1.27	±0.08	0.050	±0.003
D	0.51	±0.08	0.020	±0.003
E	3.56	±0.08	0.140	±0.003
F	4.06	±0.08	0.160	±0.003
G	1.65	±0.08	0.065	±0.003
H	0.76	+0.25 -0.00	0.030	+0.010 -0.000
J	0.51	Min.	0.020	Min.
	1.02	Max.	0.040	Max.
K	45°	Max.	45°	Max.
L	0°	Min.	0°	Min.
	7°	Max.	7°	Max.
M	0.20	±0.08	0.008	±0.003
N	2.18	Max.	0.086	Max.
P	4.57	±0.08	0.180	±0.003

FEATURES

- SIMPLIFIED AMPLIFIER DESIGN
- SUITABLE FOR BROAD BAND APPLICATIONS
- VERY LOW C_{rss}
- SIMPLE BIAS CIRCUITS
- LOW NOISE
- HIGH GAIN – 10 dB MINIMUM

APPLICATIONS

- HF/VHF/UHF COMMUNICATIONS
from 1MHz to 1GHz

ABSOLUTE MAXIMUM RATINGS ($T_{case} = 25^{\circ}C$ unless otherwise stated)

P_D	Power Dissipation	17.5W
BV_{DSS}	Drain – Source Breakdown Voltage	40V
BV_{GSS}	Gate – Source Breakdown Voltage	±20V
$I_{D(sat)}$	Drain Current	4A
T_{stg}	Storage Temperature	–65 to 150°C
T_j	Maximum Operating Junction Temperature	200°C

ELECTRICAL CHARACTERISTICS ($T_{case} = 25^{\circ}\text{C}$ unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
PER SIDE					
BV_{DSS} Drain–Source Breakdown Voltage	$V_{GS} = 0$ $I_D = 10\text{mA}$	40			V
I_{DSS} Zero Gate Voltage Drain Current	$V_{DS} = 12.5\text{V}$ $V_{GS} = 0$			1	mA
I_{GSS} Gate Leakage Current	$V_{GS} = 20\text{V}$ $V_{DS} = 0$			1	μA
$V_{GS(th)}$ Gate Threshold Voltage*	$I_D = 10\text{mA}$ $V_{DS} = V_{GS}$	0.5		7	V
g_{fs} Forward Transconductance*	$V_{DS} = 10\text{V}$ $I_D = 0.2\text{A}$	0.18			S
TOTAL DEVICE					
G_{PS} Common Source Power Gain	$P_O = 5\text{W}$	10			dB
η Drain Efficiency	$V_{DS} = 12.5\text{V}$ $I_{DQ} = 0.2\text{A}$	40			%
VSWR Load Mismatch Tolerance	$f = 1\text{GHz}$	20:1			—
PER SIDE					
C_{iss} Input Capacitance	$V_{DS} = 0\text{V}$ $V_{GS} = -5\text{V}$ $f = 1\text{MHz}$			12	pF
C_{oss} Output Capacitance	$V_{DS} = 12.5\text{V}$ $V_{GS} = 0$ $f = 1\text{MHz}$			10	pF
C_{rss} Reverse Transfer Capacitance	$V_{DS} = 12.5\text{V}$ $V_{GS} = 0$ $f = 1\text{MHz}$			1	pF

* Pulse Test: Pulse Duration = 300 μs , Duty Cycle $\leq 2\%$

THERMAL DATA

$R_{THj-case}$	Thermal Resistance Junction – Case	Max. 6°C / W
----------------	------------------------------------	--------------