

ISA to PC/104

Engineering Tools and Fixtures

ISA to PC/104 Adapter

This passive extender card allows developers to mount an 8 or 16-bit PC/104 card into a standard ISA bus PC system, avoiding the need for a dedicated PC/104 stack for development work.

The adapter is equipped with a stack-through connector so the test card can be installed on either side, enabling probing on the front or the back.


The design also includes a reset button, for convenient push-button resetting of the test card without resetting the host computer. This feature is extremely useful when debugging hardware interactions requiring a hardware clean slate.

Specifications

- PC/104 64 and 40 pin passive stack-through connectors
- Operating temperature range of -30°C to 65°C
- Breadboarding area for electrical circuit assembly and testing
- Measures 6.145" long by 4.200" high
- Reset button

Standard Usage

Simply stack the test PC/104 card onto the adapter's PC/104 connectors and insert the adapter into the host system's ISA slot. No additional configuration is required.

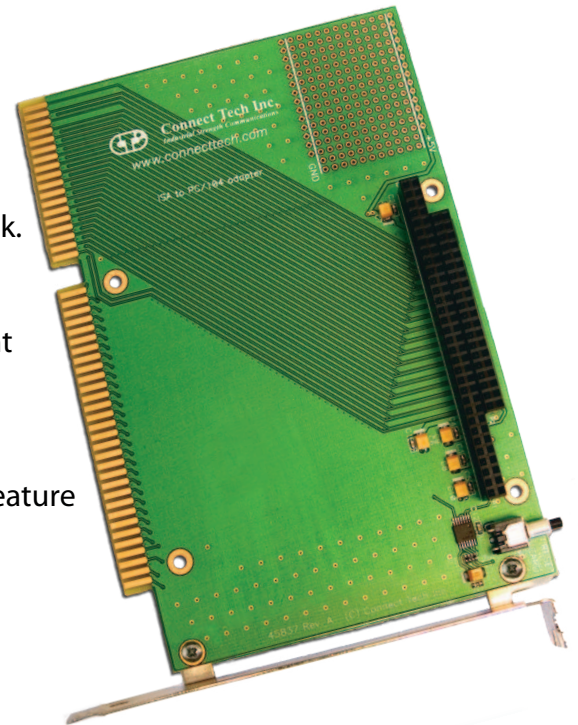

Important Note: Only one PC/104 card can be used per adapter card.



Connect Tech Inc.
Industrial Strength Communications

42 Arrow Road
Guelph, ON, Canada
N1K 1S6
www.connecttech.com

Phone: 1-519-836-1291
Toll free (in North America): 1-800-426-8979
Fax: 1-519-836-4878
Email: sales@connecttech.com