


Products in Family


GRI760/16GB (2 x 8GB 2Rx8 DIMMs)
 GRI760/32GB (2 x 16GB 2Rx4 DIMMs)
 GRI760/64GB (2 x 32GB 4Rx4 DIMMs)

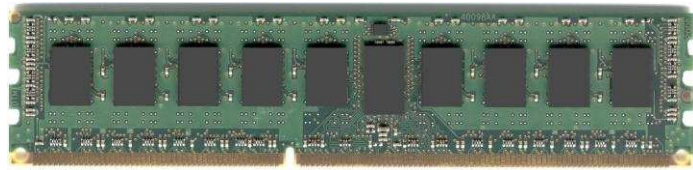

Features	Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (1.181" x 5.25") Data Transfer Rate: 8.53 Gigabytes/sec Operating Voltage: 1.35V(1.28V~1.45V) Fully RoHS Compliant Thermal Sensor	Each GRI760 upgrade consists of two DDR3 1066 MHz Registered ECC DIMMs. One 2K-bit EEPROM is used for Serial Presence Detect and a combination register/PLL with Address and Command Parity is also used. A thermal sensor accurately monitors the DIMM module and can prevent exceeding the maximum operating temperature of 95C.

Dataram Product	IBM Product	Product Description
GRI760/16GB GRI760/32GB GRI760/64GB	EM4B EM4C EM4D	16GB (2 x 8 GB RDIMMs) DDR3 1066MHz (32 GB (2 x 16 GB RDIMMs) DDR3 1066 MHz 64 GB (2 x 32 GB RDIMMs) DDR3 1066 MHz


Front view

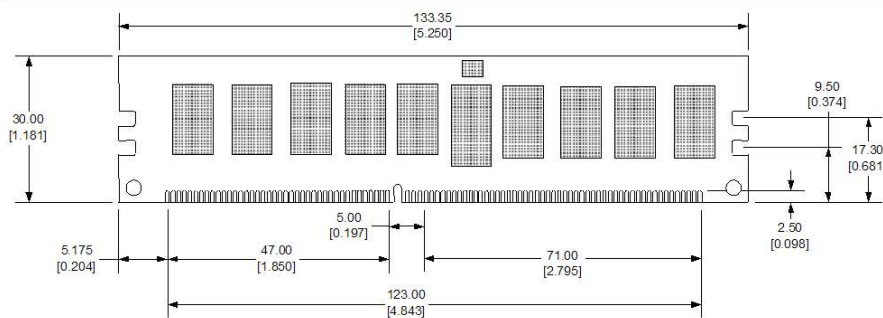

Notes

Tolerances on all dimensions except where otherwise indicated are $\pm .13$ (.005).
 All dimensions are expressed in millimeters [inches]

Back view

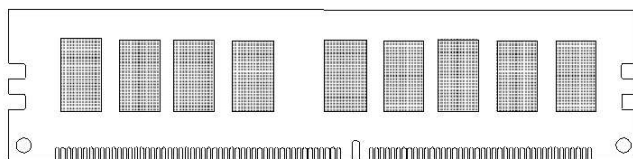

Side view

