




# "MU" SERIES MINIATURE UNIVERSAL Choke Coils

All choke coils in this series are the same size as the unit illustrated. Leads are of no. 21 tinned wire. Values from 39 uh to 470 uh are wound on phenolic forms. Values from 560 uh to 1500 uh are wound on iron core forms. Tolerances are  $\pm 10\%$ . All units are impregnated with thermosetting varnish and are E.I.A. color coded.

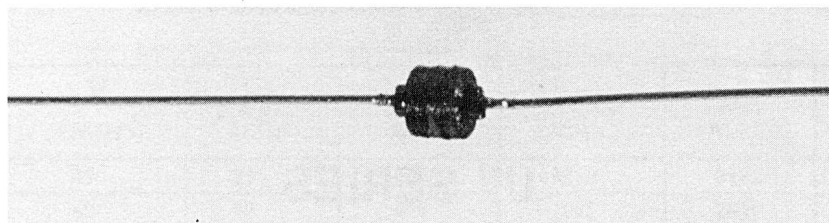

## "MU" SERIES

WILCO PART #	L uh	Q NOM.	S.R.F. NOM. (MHz)	R.D.C. OHMs NOM.	I (MA) MAX	DIA. NOM.	TEST FREQ. (MHz)
MU 390	39	20.0	11.2	5.8	185	.156	2.5
MU 470	47	18.2	10.9	6.5	175	"	"
MU 560	56	17.7	10.6	7.1	162	"	"
MU 680	68	17.0	10.5	7.8	165	"	"
MU 820	82	16.0	10.4	8.6	163	.187	"
MU 101	100	15.5	10.3	9.3	159	"	"
MU 121	120	22.4	9.6	10.8	150	"	790 KHz
MU 151	150	22.8	9.0	12.2	143	"	"
MU 181	180	23.4	7.6	13.7	140	"	"
MU 221	220	23.8	6.7	15.0	137	.218	"
MU 271	270	23.9	5.7	16.9	130	"	"
MU 331	330	24.4	5.2	18.9	126	"	"
MU 391	390	24.2	4.8	20.6	120	"	"
MU 471	470	23.1	4.3	22.6	117	"	"
MU 561	560	53.8	3.2	11.5	143	.187	"
MU 681	680	49.0	2.9	12.7	141	"	"
MU 821	820	46.6	2.4	13.9	136	"	"
MU 102	1000	43.6	2.1	15.5	131	"	"
MU 152	1500	56.7	1.9	23.9	117	.218	250KHz

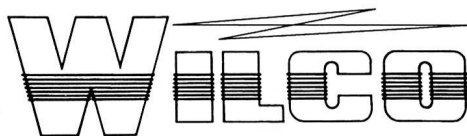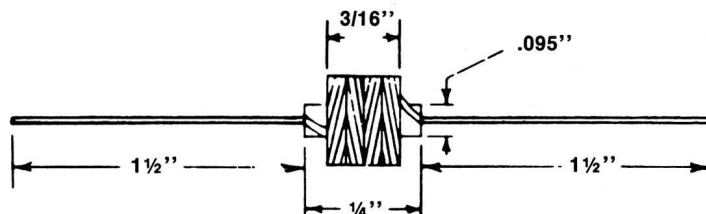

**WILCO CORPORATION**

6451 Saguaro Court  
Indianapolis, Indiana 46268

VOICE (317) 293-9300

FAX (317) 293-9482

TOLL FREE HOTLINE (800) 611-2343