


Heavy Duty CFM Metal Vane Anemometer

High Temperature Metal Vane
Withstands temperatures to 175°F (80°C) and airspeed to 78.3MPH (6890ft/min)

Features:

- Display Air Flow (CFM) or Air Velocity plus Temperature simultaneously
- Air Flow displayed in 3 modes:
 - Instantaneous value
 - Up to 20 point average
 - 2/3 flow value
- Super large (9999 count) LCD display
- 2% velocity accuracy via low friction ball bearing vane wheel on 39" (1m) cable
- Record/Recall MIN, MAX readings
- Data Hold plus Auto power off
- 9V battery power or optional AC adaptor
- Built-in RS-232 PC serial interface with optional Data Acquisition software
- Complete with 9V battery, protective rubber holster with stand, hard carrying case and metal vane sensor with 3.9ft (120cm) cable

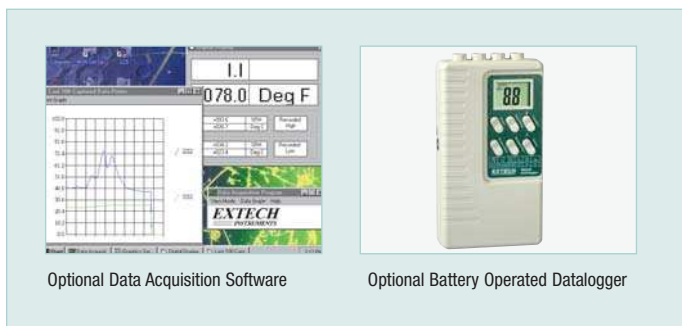

Optional Data Acquisition Software

Optional Battery Operated Datalogger

Specifications	Range	Resolution	Basic Accuracy
Air Velocity			
m/s	0.5 to 35m/s	0.01m/s	±2%rdg
ft/min	100 to 6890ft/min	1ft/min	±2%rdg
MPH	1.1 to 78.3MPH	0.1MPH	±2%rdg
knots	1.0 to 68knots	0.1knots	±2%rdg
km/h	1.8 to 126km/h	0.1km/h	±2%rdg
Temperature	32 to 175°F (0 to 80°C)	0.1°	±1.5°F (±0.8°C)
Airflow			
CFM = ft ³ /min	0 to 999,900CFM	0.001	
CMM = m ³ /min	0 to 999,900CMM	0.001	
Dimensions	7 x 2.9 x 1.3" (178 x 74 x 33mm)		
Weight	1.6lbs (0.7kg)		

Ordering Information:

- 407113Heavy Duty CFM Metal Vane Anemometer
- 407113-NIST407113 with Calibration Traceable to NIST
- 156119117V AC Adaptor
- 156221220V AC Adaptor
- 409997Soft Vinyl Pouch Carrying Case
- 140001Replacement Hard Vinyl Carrying Case with handle
- 407001Data Acquisition program and cable
- 380340Battery Operated Datalogger Module

