



92x92x38mm

- Airflow: 80.5~117.3 CFM
- Static Pressure: 7.8~15.5 mm-H₂O
- Blade / Housing: Plastic Material UL 94V-0 P.B.T.
- Lead Wire: UL1007 #24 AWG
- Weight: 198.4 g

DC AXIAL FAN

DC BLOWER

XTREME SERIES

AC AXIAL FAN

| Model No. | Bearing | Rated Voltage | Operating Voltage Range | Speed | Max. Airflow | Max. Static Pressure | Current | Power Consumption | Life at 40°C L10 | P-Q Curve | Noise Level |
|---------------|---------|---------------|-------------------------|-------|--------------|----------------------|---------|-------------------|------------------|-----------|-------------|
| | | VDC | VDC | RPM | CFM | mm-H ₂ O | mA | W | Hour | | dB(A) |
| XYW09238012BL | 2B | 12 | 7~13.2 | 3300 | 80.5 | 7.8 | 450 | 5.40 | 80000 | 4 | 48.0 |
| XYW09238012BM | 2B | | 7~13.2 | 3800 | 92.6 | 10.9 | 640 | 7.68 | 80000 | 3 | 51.0 |
| XYW09238012BH | 2B | | 7~13.2 | 4300 | 102.9 | 11.9 | 950 | 11.40 | 75000 | 2 | 55.0 |
| XYW09238012BS | 2B | | 7~13.2 | 4900 | 117.3 | 15.5 | 1200 | 14.40 | 65000 | 1 | 57.0 |
| XYW09238024BL | 2B | 24 | 12~26.4 | 3300 | 80.5 | 7.8 | 250 | 6.00 | 80000 | 4 | 48.0 |
| XYW09238024BM | 2B | | 12~26.4 | 3800 | 92.6 | 10.9 | 350 | 8.40 | 80000 | 3 | 51.0 |
| XYW09238024BH | 2B | | 12~26.4 | 4300 | 102.9 | 11.9 | 470 | 11.28 | 75000 | 2 | 55.0 |
| XYW09238024BS | 2B | | 12~26.4 | 4900 | 117.3 | 15.5 | 600 | 14.40 | 65000 | 1 | 57.0 |
| XYW09238048BL | 2B | 48 | 24~56.0 | 3300 | 80.5 | 7.8 | 130 | 6.24 | 80000 | 4 | 48.0 |
| XYW09238048BM | 2B | | 24~56.0 | 3800 | 92.6 | 10.9 | 170 | 8.16 | 80000 | 3 | 51.0 |
| XYW09238048BH | 2B | | 24~56.0 | 4300 | 102.9 | 11.9 | 240 | 11.52 | 75000 | 2 | 55.0 |
| XYW09238048BS | 2B | | 24~56.0 | 4900 | 117.3 | 15.5 | 290 | 13.92 | 65000 | 1 | 57.0 |

2B: 2-ball bearing D: 1-ball 1-sleeve bearing L: sintetico bearing S: sleeve bearing

Voltage Available

05 12 24 48


Bearing System Available

2B L S

Function Available

- 1 6 5 4 3 2 7 8 9 10 11 14 12 13

PERFORMANCE P-Q CURVE

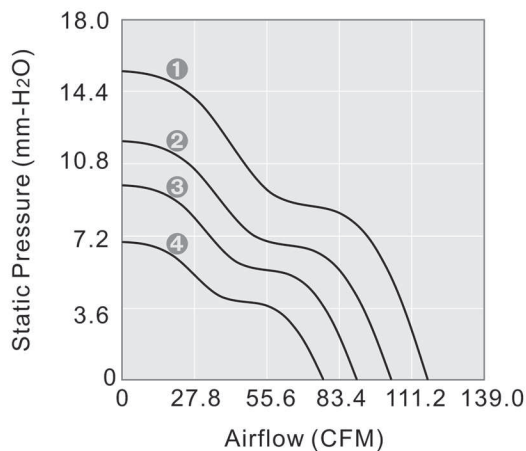

OUTLINE DIMENSIONS

