

Click Here To Buy Now From The Y.S. Tech USA Online Store



172x150x51mm

- **Airflow: 247.5~464.0 CFM**
- **Static Pressure: 16.7~52.0 mm-H₂O**
- **Blade / Housing: Plastic Material UL 94V-0 P.P.O.**
- **Frame: Die-Casting Aluminum**
- **Lead Wire: UL1007 #22 AWG**
- **Weight: 1080 g**

Model No.	Bearing	Rated Voltage	Operating Voltage Range	Speed	Max. Airflow	Max. Static Pressure	Current	Power Consumption	Life at 40°C L10	P-Q Curve	Noise Level
		VDC	VDC	RPM	CFM	mm-H ₂ O	mA	W	Hour		dB(A)
XYW17251012BL	2B	12	7~13.2	3000	247.5	16.7	1800	21.60	80000	6	57.2
XYW17251012BM	2B		7~13.2	3500	294.4	23.7	2800	33.60	80000	5	62.1
XYW17251024BL	2B	24	12~26.4	3000	247.5	16.7	850	20.40	80000	6	57.2
XYW17251024BM	2B		12~26.4	3500	294.4	23.7	1250	30.00	80000	5	62.1
XYW17251024BH	2B	24	12~26.4	4000	335.4	29.8	1850	40.40	75000	4	63.0
XYW17251024BS	2B		12~26.4	4500	379.7	37.1	2700	64.80	65000	3	67.3
XYW17251048BL	2B	48	24~56.0	3000	247.5	16.7	440	21.12	80000	6	57.2
XYW17251048BM	2B		24~56.0	3500	294.4	23.7	650	31.20	80000	5	62.1
XYW17251048BH	2B	48	24~56.0	4000	335.4	29.8	950	45.60	75000	4	63.0
XYW17251048BS	2B		24~56.0	4500	379.7	37.1	1250	60.00	65000	3	67.3
XYW17251048BSE	2B	48	24~56.0	5000	419.9	46.3	1650	79.20	65000	2	71.1
XYW17251048BSS	2B		24~56.0	5500	464.0	52.0	2400	115.2	65000	1	73.1

2B: 2-ball bearing L: sintetico bearing S: sleeve bearing

Voltage Available

05 12 24 48


Bearing System Available

2B L S


Function Available

1 6 5 4 3 2 7 8 9 10 11 14 12 13

PERFORMANCE P-Q CURVE

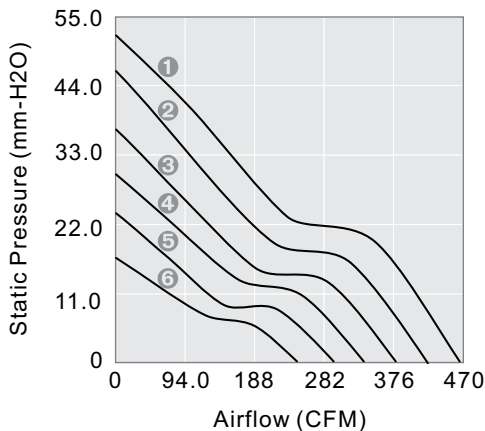

OUTLINE DIMENSIONS

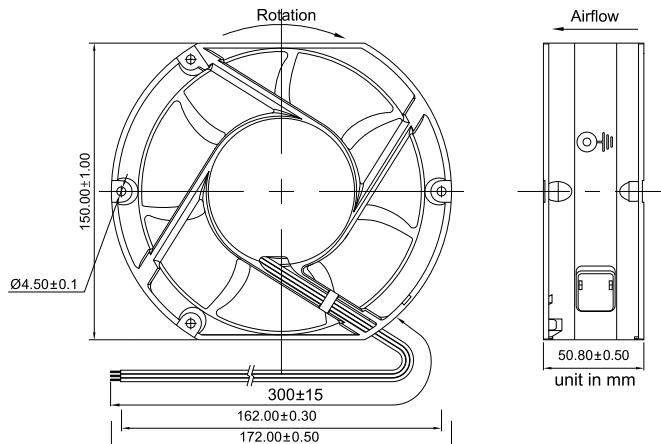

Please refer to *Model Numbering System* for bearing, function and speed level indication. Specifications are subject to changes without notice. Please refer to the formally issued product specification via contacting Y.S. TECH sales department. Visit Y.S. TECH web site at <http://www.ystechusa.com/> for updated information. Customized Specifications are designed accordingly.

DC AXIAL FAN

DC BLOWER

XTREME SERIES

AC AXIAL FAN