


REV.	DATE	ECR NO.	DESCRIPTION
NC	06/16/04	XXXXXX	INITIAL RELEASE
A	08/20/13	2517	CORRECT OVERALL LENGTH DIMENSION, ADD ELECTRICAL/MECHANICAL NOTES, UPDATE DRAWING FORMAT

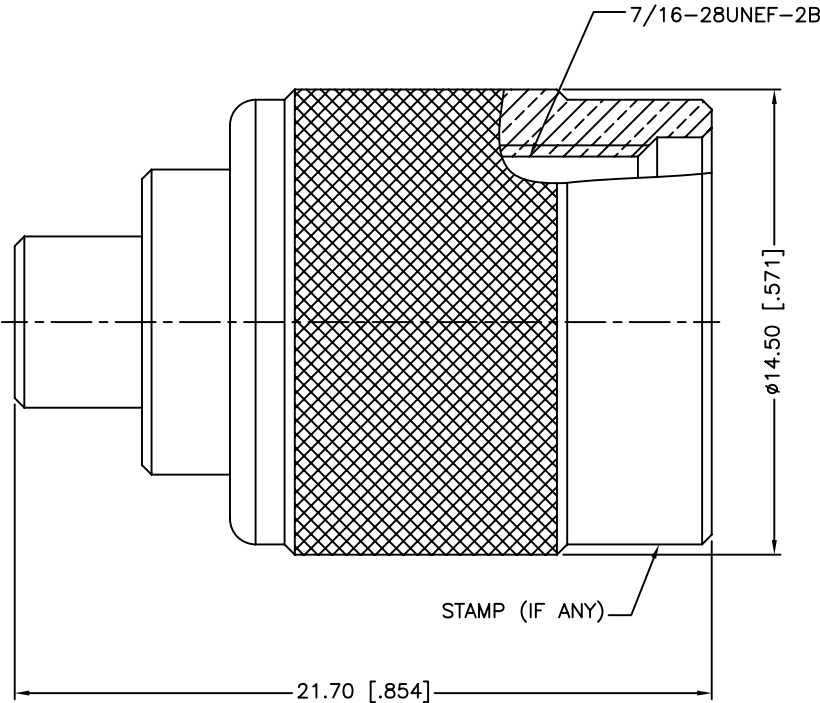

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: 0-6 GHZ
3. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
4. DURABILITY: 500 CYCLES MIN.
5. TEMPERATURE RANGE: -55°C TO +155°C

					APPROVALS		DATE	Amphenol Connex			
8	SHELL	BRASS	NICKEL	1	DRAWN	M.ZHANG	08/20/13				
7	WASHER	RUBBER	RED	1	CHECKED			PART DESCRIPTION			
6	RETAINER RING	BRASS	NICKEL	1	ISSUED			TNC MALE TO MCX FEMALE ADAPTER			
5	RING	DELRIN	NATURAL	1	SHEET	1 OF 1		PART NO.			
4	WASHER	BRASS	NICKEL	1	CAD FILE	C:/CONNEX/242208.DWG		242208			
3	CONTACT PIN	BER. COPPER	GOLD	1				DWG. NO. 242208.DWG			
2	INSULATOR	PTFE	NATURAL	1				REV. A			
1	BODY	BRASS	NICKEL	1				SIZE A			
DESCRIPTION MATERIAL FINISH QTY								SCALE NA			