


- NOTES:
- MATERIALS AND FINISHES(PLATING THICKNESS IN MICRO-INCHES):
BODY - BRASS, NICKEL PLATING
CONTACT - BRASS, GOLD PLATING
INSULATOR - PTFE, NATURAL
 - ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC 0-4 GHz
C. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
 - MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65°C to +165°C
 - WHEN CRIMPING CONTACT PIN TO CABLE, CRIMP WITH AMPHENOL TOOL 227-944 (M22520/5-01) AND DIE SET 227-1221-09, CAVITY 'B' (M22520/5-09, CLOSURE 'B')
 - WHEN CRIMPING FERRULE TO CABLE, CRIMP WITH AMPHENOL TOOL 227-944 (M22520/5-01) AND DIE SET 227-1221-09 CAVITY 'A' (M22520/5-09 CLOSURE 'A')
 - PACKAGE THIS CONNECTOR IN BAG 999-225.






THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A2	APPEARANCE WAS CHANGED\N/A	15-Apr-03		
A3	ITEM 1 WAS CHANGED\N/A\06-30-05'	30-Jun-05		
B	ITEM 6 WAS 31-1500-C\RD-DM06092201C	14-Oct-06		SH
H	ITEM 4 WAS CHANGED\RD-DM09112701T1	17-Mar-10	47921	SH

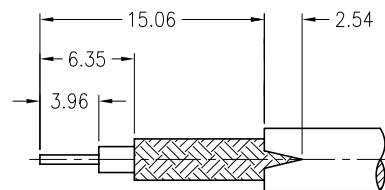

RECOMMENDED
CABLE STRIPPING DIM'S

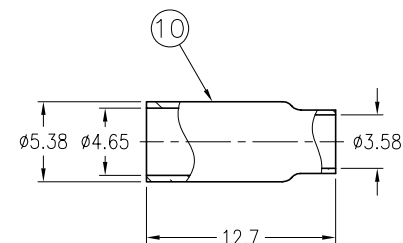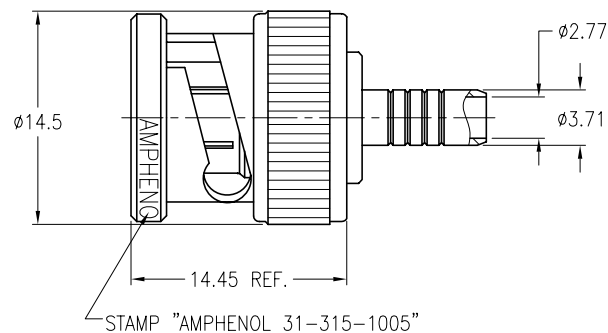

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
< 0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES
±0.05mm ±0.1mm ±0.2mm ± 0.3mm ±1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL

REFERENCE

FINISH

DRAWN
T.DENG

ENGINEER
C.WANG

APPROVED
S.HSIEH

CAD FILE

F:\DWG\CNPD\31\315\1005-HSZ

DATE

05-Jan-10'

DATE

05-Jan-10'

DATE

17-Mar-10'

TITLE

BNC PLUG MIL-CRIMP 23329
(FOR DOUBLE BRAIDED
RG-188/U CABLE)

SCALE: 2/1

DWG SIZE

B

SHEET

2 OF 2

CODE ID

74868

REV

H

Amphenol RF

Danbury CT USA, Tainan Taiwan, Shenzhen China
www.amphenolrf.com

DRAWING NO.

31-315-1005

ITEM NO.

31-315-1005

PART NO.

31-315-1005