


- NOTES:
1. MATERIALS AND FINISHES:
BODY - BRASS, NICKEL PLATING
CONTACT - BRASS, GOLD PLATING
INSULATOR - PTFE , NATURAL
2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC - 4 GHz.
C. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65 C TO +165 C
4. WHEN CRIMPING CONTACT PIN TO CABLE, CRIMP WITH AMPHENOL TOOL 227-944 (M22520/5-01) AND DIE SET 227-1221-09, CAVITY 'B' (M22520/5-09, CLOSURE 'B')
5. WHEN CRIMPING FERRULE TO CABLE, CRIMP WITH AMPHENOL TOOL 227-944 (M22520/5-01) AND DIE SET 227-1221-09, CAVITY 'A' (M22520/5-09, CLOSURE 'A')
6. USE WITH RG 122; BELDEN 8218, 1406A, 1164A,1167A, 1418A, 1407A, 1417A CABLES , AND AT&T 735A, CLARK CV75SM CABLES.



THIRD ANGLE PROJ. 

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A2	APPEARANCE WAS CHANGED\N/A	15-Apr-03		
A3	SEE SHEET 1	30-Jun-05		
B	SEE SHEET 1	28-Sep-06		SH
W	REDRAWN TO UPDATE FORMAT	12-Nov-08	47247	SH
Y	SEE SHEET 1	17-Mar-10	47921	SH

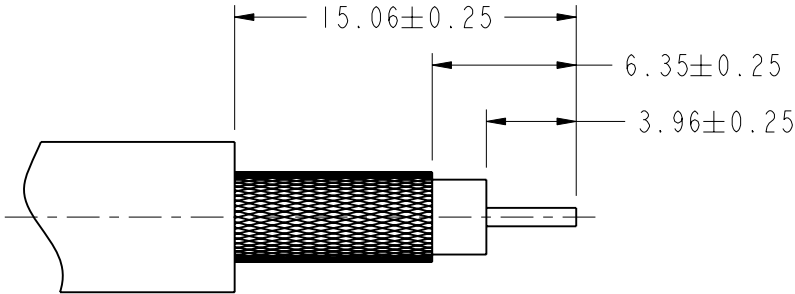

RECOMMENDED CABLE
STRIPPING DIMENSION'S

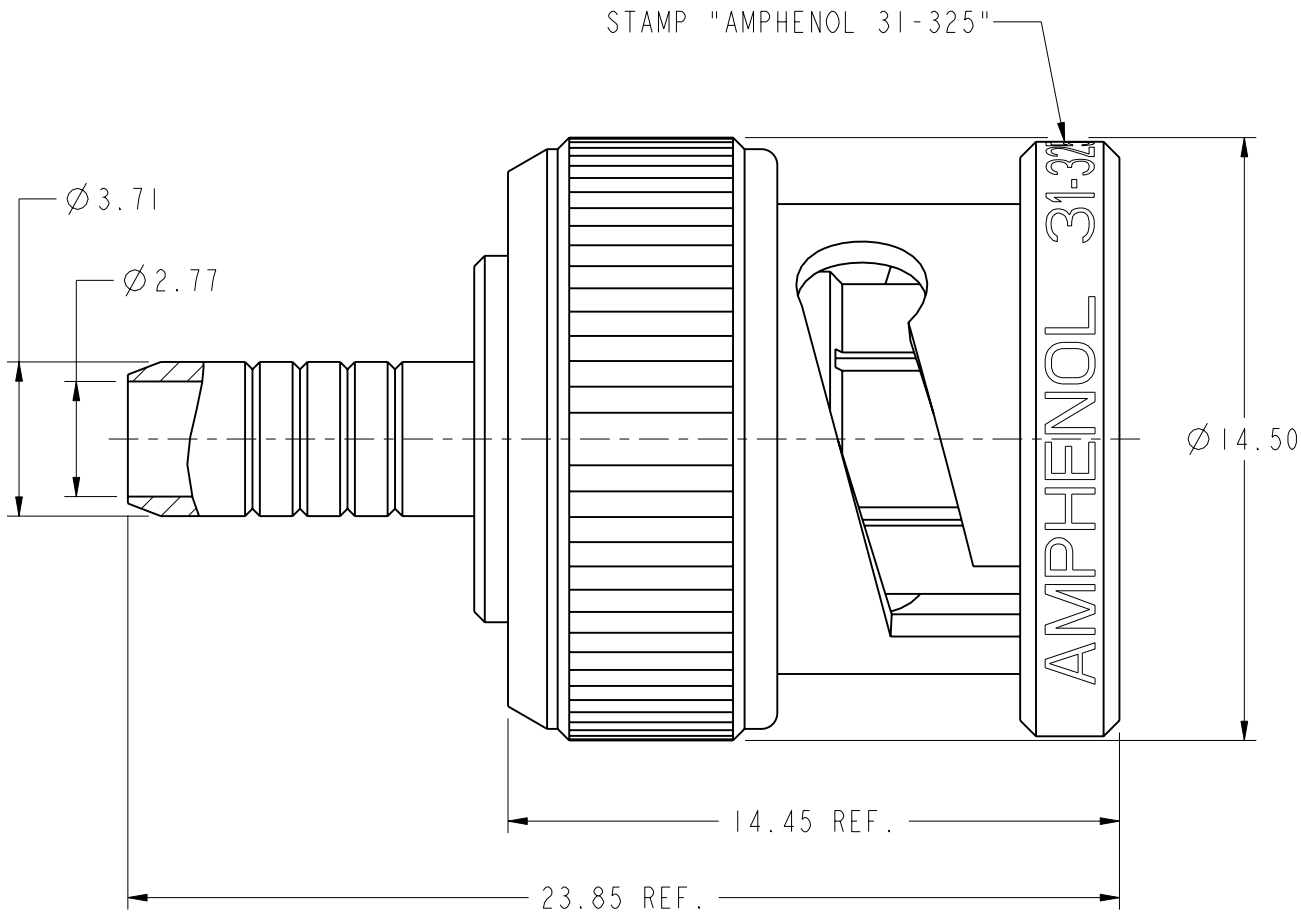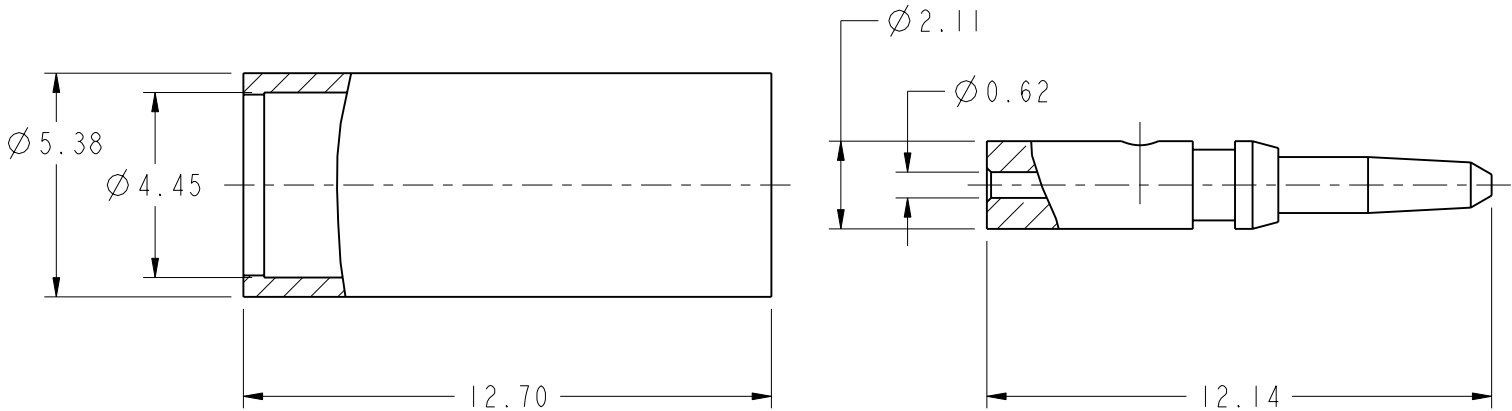

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
<0.5mm ± 0.05mm 0.5 - 6mm ± 0.1mm 6 - 30mm ± 0.2mm 30 - 120mm ± 0.3mm ANGLES ±1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implicatioin or otherwise in any manner licensing, granting rights to permitting such holder or any other sperson to manufacture, use or sell any product, process or design, patented or otherwsie, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL

-

REFERENCE

FINISH

DRAWN
T.DENG

DATE
19-Jan-10

ENGINEER
C.WANG

DATE
19-Jan-10

APPROVED
S.HSIEH

DATE
17-Mar-10

CAD FILE

1:/BNC/31-325

TITLE

BNC PLUG
RGB AND SVHS CABLES

SCALE: 5.5:1.0

DWG SIZE
B

SHEET

2 OF 2

REV
Y

Amphenol RF

Danbury CT USA, Tainan, Taiwan, Shenzhen, China
www.amphenolrf.com

DRAWING NO.31-325

ITEM NO.31-325

PART NO.31-325