




## PRODUCT SPECIFICATION

**CATALOG NUMBER:** See table below

**DESCRIPTION:** 10/4 SEOOW adapter cord with 125/250V dryer plug and twist-to-lock 30A cord connector

### CONSTRUCTION PARAMETERS:

Cable type: 10/4 SEOOW  
Conductors: 10 ga bare copper, 104/30 stranding  
Jacket material: TPE, black  
Overall cable O.D. (nom): 0.705 in.  
Cord rating: Extra Hard Usage per the National Electrical Code

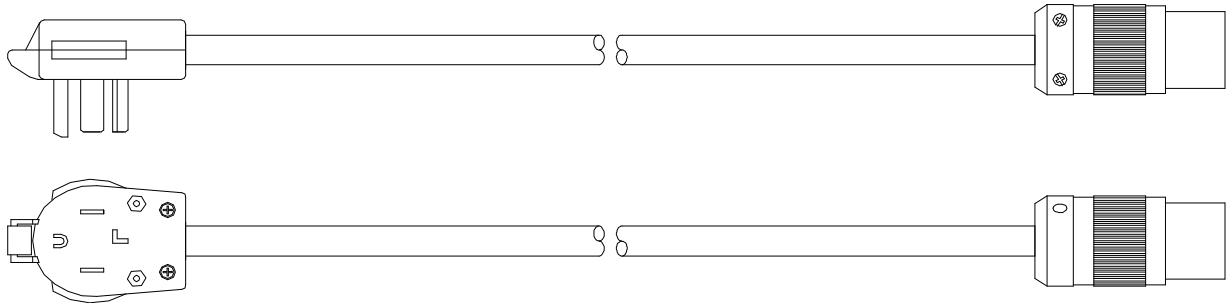

*Note: Plug and connector style may vary*

Cord length (nom): See table below  
Attachment plug configuration: NEMA 14-30P (dryer plug)  
Cord connector configuration: NEMA L14-30R twist-to-lock  
Plug material: PVC, black  
Cord connector material: Nylon, white body with black backshell

### ELECTRICAL AND PHYSICAL PROPERTIES:

Cable temperature rating: -50 to +105 °C  
Nominal operating voltage: 125/250 VAC  
Maximum operating current: 30A

### CATALOG NUMBERS:

| Catalog number | Length |
|----------------|--------|
| 01854          | 10 ft  |

The information presented here is, to the best of our knowledge, true and accurate. However, since conditions of use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part. We disclaim all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable Inc. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable Inc.