

# T380/E380 SERIES




The T380/E380 Series features a chip thermistor encapsulated with epoxy in a molded vinyl cup. The 60 inch stranded tin-plated copper leads are #28 or #30 AWG and insulated with 105°C PVC zip cord. Typical maximum tip diameter is either 0.085 or 0.095 inches, and the overall length of the sensor is 60 inches.



## ENGINEERING INFORMATION

- Typical diameters: 0.085 or 0.095 inches
- Leads: tin-plated copper, 105°C PVC insulation zip cord
- Material: epoxy, vinyl
- Typical wire size: #28 to #30 AWG
- Typical operating temperature range: 0°C to 70°C
- E380 sensors RoHS compliant
- Available in point-matched and interchangeable tolerances

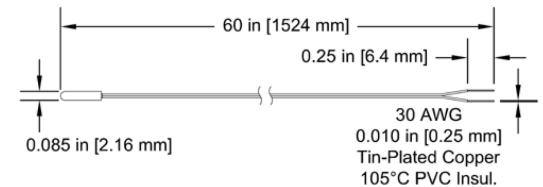

## STANDARD R/T CURVES AND VALUES

### Resistances at 25°C (ohms)

2252, 10k

### Curves

Z/D

### Tolerances (+/-)

0.1°C (0°C to 70°C), 0.2°C (0°C to 70°C)

Additional resistance, curve or tolerance options may be available. Please contact QTI for these and other customization options.

QTI can customize this part for you. Contact us for available options.

2108 Century Way Boise, Idaho 83709 USA  
T: (208) 377-3373, 800-554-4784  
F: (208) 376-4754  
qtisales@thermistor.com  
www.thermistor.com

**Qti**  
Sensing Solutions