



HCMOS TCXO STO-5032B

Applications

- Cellular and Network Equipment

Features

- HCMOS output with Tri-state function
- Ceramic package, Dimensions (5.0×3.2×1.05)
- High stability ±2.5ppm / -30°C ~ +75°C
- Low current consumption
- Low phase noise, Low jitter

Specifications




Model		STO-5032B
Frequency range		0.675~55.000 MHz
Nominal frequency (MHz)		5, 10, 12, 16, 20, 24, 32, 40, 44
Storage temperature range		-40~ +125 °C
Operating temperature range		-30~ +75 °C
Frequency stability	Tolerance at 25°C	±2.0 × 10 ⁻⁶ (Sixty minutes after reflow)
	Temperature (+25°C basis)	±2.5 × 10 ⁻⁶ / -30~+75°C
	Supply voltage change	±0.2 × 10 ⁻⁶ / Vdd ± 5%
	Load change	±0.2 × 10 ⁻⁶ / ZL ± 10%
Aging		±1.0 × 10 ⁻⁶ / year at +25°C
Power supply voltage (Vdd)		+2.5V, +2.8V, +3.3V DC ± 5%
Current consumption		*note / 10uA max (Standby)
Output level		C-MOS
Load		15pF
Output voltage level		V _{OL} : 10%Vdd max. / V _{OH} : 90%Vdd min.
Rise & Fall time		5ns max. / 10%Vdd - 90%Vdd
Duty cycle		45% ~ 55% at 1/2Vdd
Phase Noise / Jitter		-145dBc/Hz Typ. at 10kHz offset / 1 σ 3ps typ.
Tri-state Function		#1: Floating. or "H" → Output enable / #1: "L" → Output disable (Hi-Z)

*Reference / I_{dd} Spec (mA max.)


Frequency	4~10MHz	~20MHz	~30MHz	~40MHz	~54MHz
2.5V	3.1	3.7	4.2	4.6	5.5
2.8V	3.4	4.1	4.7	5.2	6.0
3.3V	4.0	4.8	5.5	6.0	7.0

Package quantity: 1,000pcs max./Reel.

Outline and Dimensions [unit:mm]

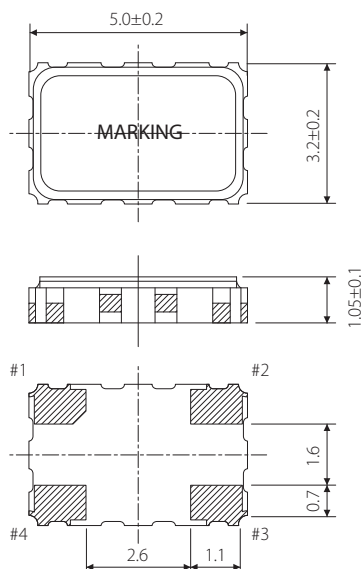

Example of a Terminal Land Pattern



Terminal	Connection
#1	Tri-state
#2	GND
#3	OUTPUT
#4	Vdd

Tri-state Function

Tri-state Pin	Output
High or Floating	Active
Low	Hi-impedance