


- NOTES:
- MATERIALS AND FINISHES:
BODY - BeCu, GOLD PLATING,
CONTACT - BeCu, GOLD PLATING
INSULATOR - PTFE
 - ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC - 20 GHz
 - MECHANICAL:
A. DURABILITY: 100 CYCLES MIN.
B. ENGAGEMENT FORCE: 15 LB [67 N] MAX
C. DISINGAGEMENT FORCE: 2 LB [9 N] MIN
E. TEMPERATURE RANGE: -65° C TO 165° C
 - PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL, SMP-FSBA-254, AND DATE CODE"


THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG		47635	PNE

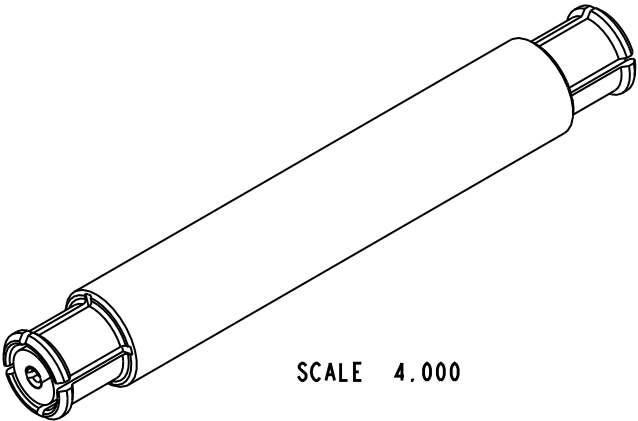

SCALE 4.000

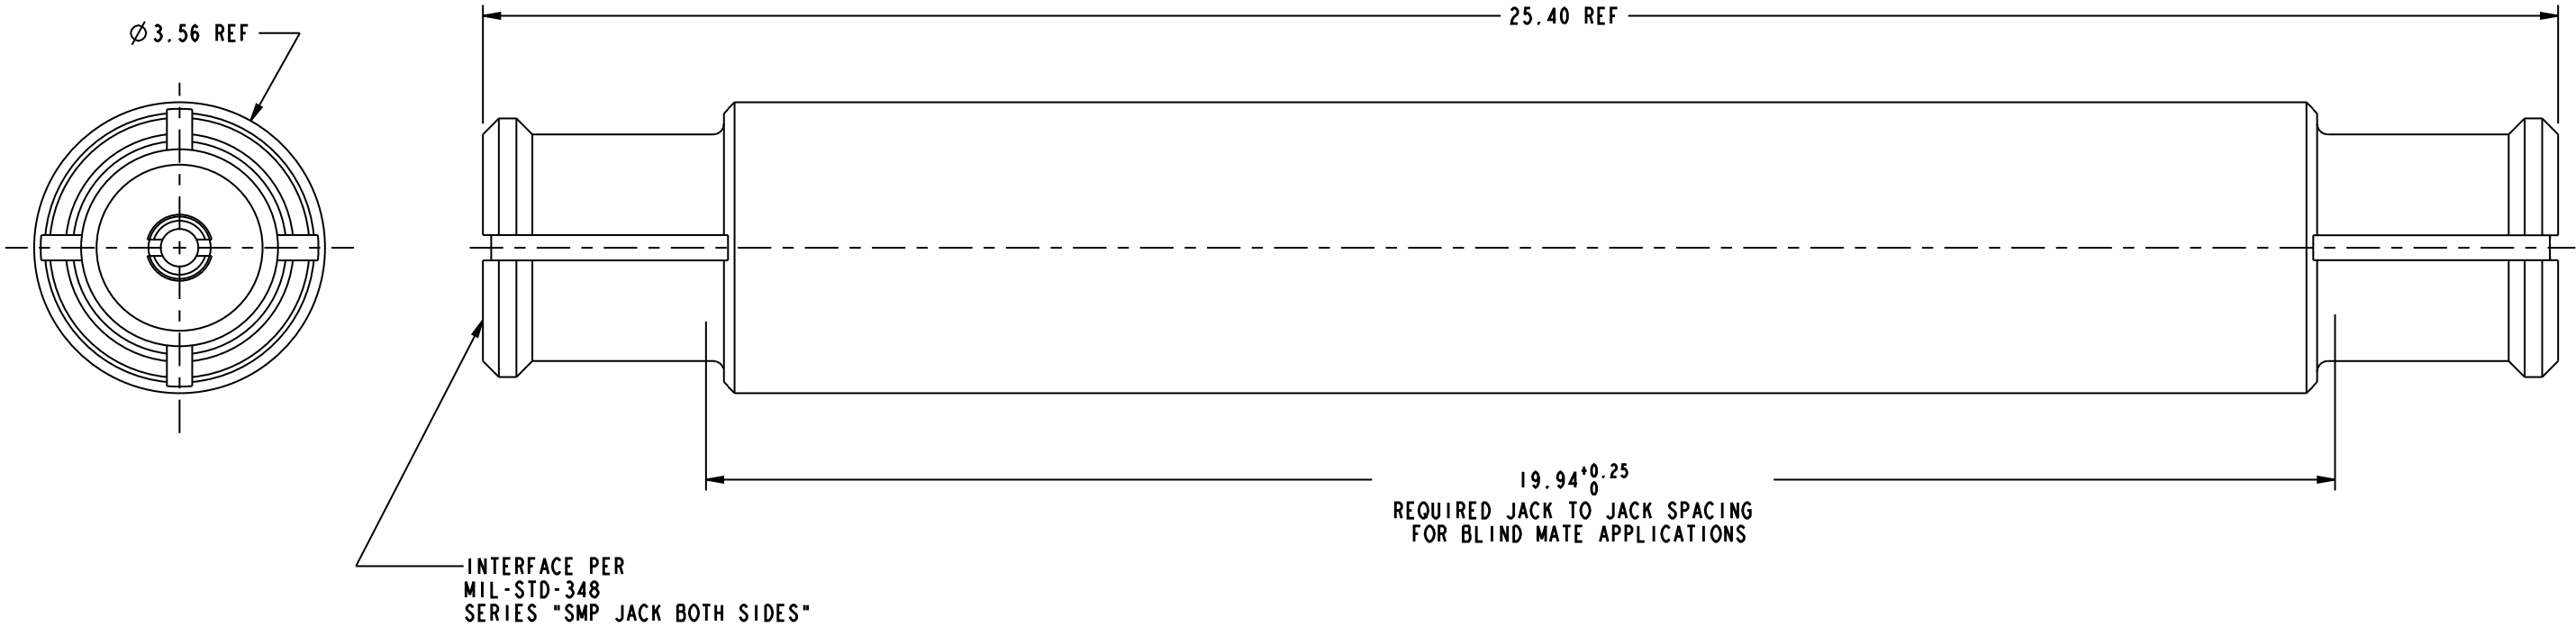

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ±0.1mm ±0.2mm ± 0.3mm ±1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL SEE NOTES	DRAWN K.LI	DATE 02-Jul-09	TITLE ASSEMBLY SMP, F-F, ADAPTER			Amphenol RF Danbury CT USA, Tainan, Taiwan, Shenzhen, China www.amphenolrf.com	
		ENGINEER PADMANABHAN E	DATE 26-Mar-09				DRAWING NO.SMP-FSBA-254	
	REFERENCE EAR # 3477 AND SMP-FSBA-224	APPROVED S.HSIEH	DATE 2-Jul-09	SCALE: 12.0:1.0		SHEET 2 OF 2		ITEM NO.SMP-FSBA-254
	CONFIGURATION LEVEL: Prototype	CAD FILE Root Folder/SMP/SMP-FSBA-254		DWG SIZE B	CODE ID 74868	REV A	PART NO.SMP-FSBA-254	
	FINISH							