
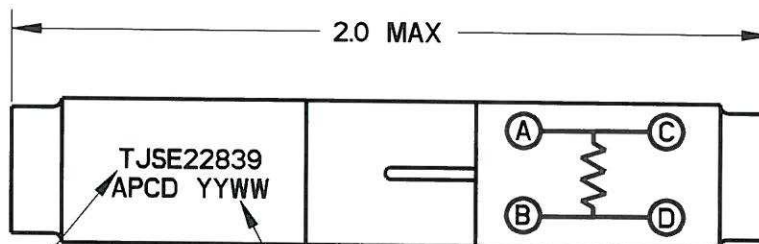


REV	ECN	APP'D
-	6582	<i>JA 9/10/10</i>



WHITE MARKING
.06 HT

DATE CODE

NOTES:

1. MATERIALS:

HOUSING: POLYETHERIMIDE, COLOR BLACK

GROMMET: SILICONE ELASTOMER, COLOR BLUE

INTERNAL CONTACT: COPPER ALLOY, GOLD PLATED,
PER MIL-DTL-45204, TYPE I, GRADE C, CLASS I

50 MICROINCH MIN. OVER NICKEL PER SAE-AMS-QQ-N-290,
CLASS 1, 50/30 MICROINCH MIN.

CONTACT RETAINER: STAINLESS STEEL

2. SPLICE ACCEPTS (4) MATING M39029/I-100 CONTACTS
(INCLUDED)

3. PART COMPLIES TO ALL REQUIREMENTS PER SAE-AS81714.

4. RESISTOR: 4.99Ω , 1/4W, $\pm 1\%$, RLR07C4R99FM

DIMENSIONS ANSI Y14.5M UNITS: INCHES Pro/E FILE	TOLERANCES .XX ± 0.01 .XXX ± 0.005 ANGLES $\pm 2.0^\circ$	PROJECTION 	Amphenol Pcd SPECIFICATION DRAWING ENGR M. DiGIACOMO 08/12/09		TITLE WIRE SPLICE, ELECTRONIC RESISTOR, 4.99Ω , 1/4W, 1% SIZE 22		
ORIGINAL	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD BEVERLY, MA, USA		CHKD <i>Rid Nunn 9/10/10</i> APPD <i>Jack to 9/10/10</i>		SIZE A	DWG NO. TJSE22839_C	REV -
		CODE: 58982		SCALE: 2:1		SHEET 1 OF 1	