



N=Number of contacts

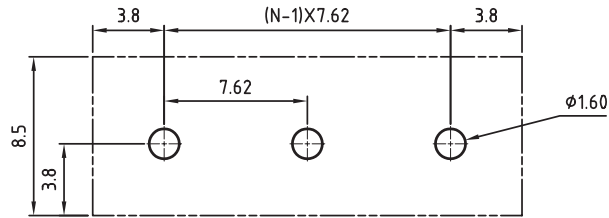

PCB LAYOUT - COMPONENT VIEW

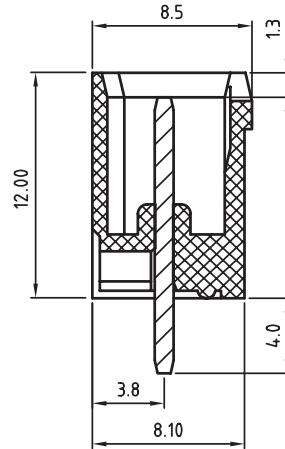

TECHNICAL CHARACTERISTICS

MATERIAL  
 INSULATOR: PBT  
 FLAMABILITY RATING: UL94-V0  
 COLOR: GREEN  
 CONTACT: BRASS  
 SOLDER TAIL PLATING: TIN

ENVIRONMENTAL  
 OPERATING TEMPERATURE: -40 UP TO 105°C  
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL  
 CURRENT RATING: 20A  
 WORKING VOLTAGE: 300VAC  
 WITHSTANDING VOLTAGE: 1.6KV  
 CONTACT RESISTANCE: 20 mOhm max

MECHANICAL  
 PITCH: 7.62MM

SOLDERING: WAVE PROCESS ONLY

PACKAGING: BOX

SERIE 3114

CERTIFICATION



RoHS Compliant

|     |           |      |    |
|-----|-----------|------|----|
| G   |           |      |    |
| F   |           |      |    |
| E   |           |      |    |
| D   |           |      |    |
| C   |           |      |    |
| B   |           |      |    |
| A   | 12-NOV-08 | PDF  | JP |
| REV | DATE      | FILE | BY |

|              |
|--------------|
| PROJECTION:  |
|              |
| APPROVAL: RJ |

|                   |
|-------------------|
| GENERAL TOLERANCE |
| .X = +/- 0.2      |
| .XX = +/- 0.15    |
| UNIT: MM          |
| SCALE:            |
| SHEET: 1/1        |
| DRAW: MARVIN      |

|  |           |
|--|-----------|
|  |           |
| DESCRIPTION: SERIE 3114 - 7.62MM CLOSE VERTICAL PCB HEADER<br>WR-TBL | SIZE      |
| WERI PART NO: 691 311 400 1xx  | <b>A4</b> |