

Presettable LCD

Hour Meter, T44xxxxY Series

ENM's series T44 features two 6-digit, 7 segment LCD display. The accumulated hours are stored on powerless, non-volatile data backup using CMOS EEPROM technology, where small space and reliable instruments are required with memory that does not rely on a battery. Hour meter module displays hour glass and decimal point. This model is ideal for maintenance applications.

Special functions:

- Allows customer to preset total hours and replace a failed meter without loss of total elapsed time



T44xxxxY

Specifications


Display Reading:	99999.9 with running indicator (Automatically recycle to zero)
Digit Height:	7mm (.276 in)
Operating Voltage:	4.5 to 60 V DC/AC or 115 to 275 V DC/AC 50/60HZ
Operation current:	(.5mA @ 4.5V), (6mA @ 60V) (.5mA @ 115V), (1.5mA @275V)
Resolution:	0.1 hours
Memory capacity:	CMOS EEPROM, Non-volatile memory has data retention in excess of 25+years without power.
Input Device:	Two terminals
Storage and Operating Temperature:	-40° to +85° C
Humidity:	95% RH+32C for 2 Hours
Protected from:	Alternator load dump, inductive Switching
Totally Sealed Unit:	IP67 Protection
Polarity:	Non-sensitive input
Case Style:	Front panel mount. Other styles are available

Features

- Presettable hours
- Non-volatile memory (no battery)
- IP67 Protection
- Data retained up to 25+ years
- AC/DC voltage compatible
- Easy to read 7mm digits
- Flashing hourglass icon shows it's working
- Fits standard panel cut-out
- Wide operating temperature range
- Solid state electronics
- Silent operation, no moving parts
- Non-resettable

2014 ENM Co.®

T44xxxxY Series

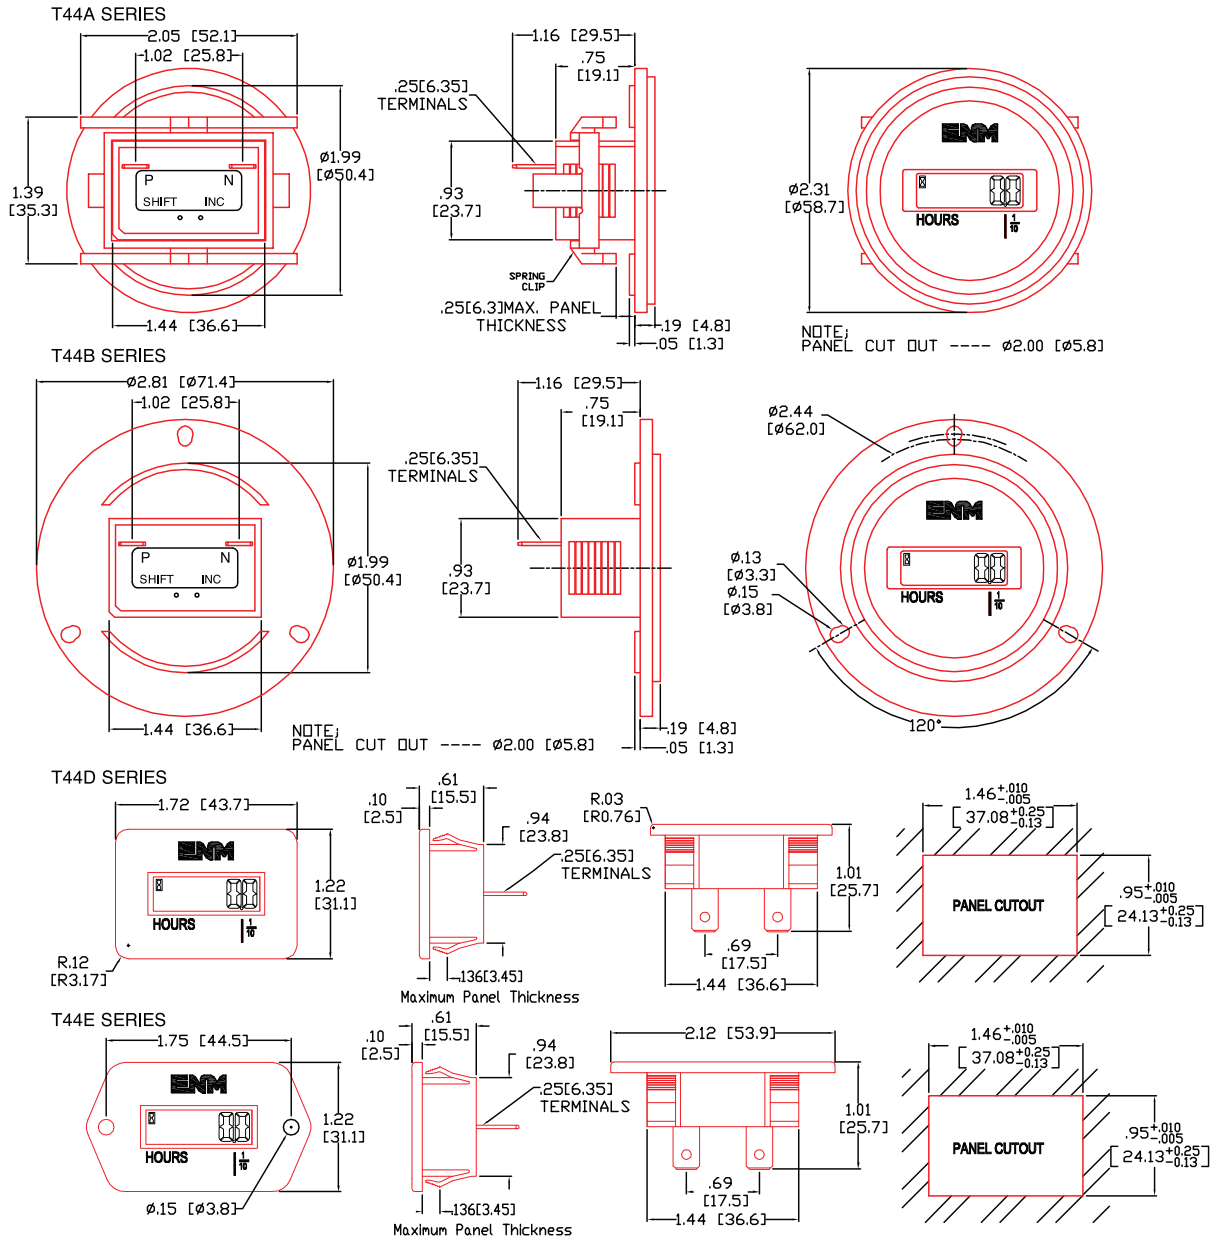

2014 ENM Co.®

LIMITED WARRANTY

ENM Company resettable electromechanical counters are warranted to the consumer to be free from defects in material and workmanship for a period of 1 year. All ENM products which fall within the warranty period due to defects in material or workmanship will be repaired or replaced, at ENM's option, without charge to the consumer when returned with proof of purchase to any authorized ENM dealer in the United States, transportation charges prepaid, provided there is no evidence of improper installation, tampering, or other abuse. All implied warranties, including any implied warranty of merchantability or fitness for a particular purpose, shall be limited in duration to the express warranty period specified above. ENM disclaims any liability for consequential damages due to breach of any written or implied warranty on its products. Datasheet information subject to change.