

HD-RX3-C

4K HDMI® over HDBaseT® Receiver

- > HDBaseT® Certified 4K Ultra HD signal extender
- > Extends uncompressed digital video and audio over a single CAT type twisted pair cable^[1]
- > Supports cable lengths up to 330 ft (100 m) for all resolutions up to 4K and Ultra HD using DM® Ultra cable^[1]
- > Supports cable lengths up to 330 ft (100 m) for 1080p, WUXGA, and 2K using DM 8G® cable or CAT5e^[1]
- > Supports cable lengths up to 230 ft (70 m) for 4K and UHD using DM 8G cable, or 165 ft (50 m) using CAT5e^[1]
- > Compatible with HDBaseT sources^[3]
- > Compatible with HDMI® and DVI display devices^[4]
- > Supports Dolby® TrueHD, DTS-HD®, and uncompressed 7.1 linear PCM audio
- > HDCP compliant
- > Passes CEC and EDID
- > Enables IR and RS-232 signal extension when paired with an HD-TX3-C^[2,3]
- > 24VDC power pack included
- > No programming or configuration required

The Crestron® 4K HDMI® over HDBaseT® Receiver (HD-RX3-C) delivers a professional-grade digital HD AV signal extension solution for use in the home, classroom, auditorium, or corporate boardroom. Without any special setup or configuration, the HD-RX3-C connects directly to an HDBaseT source, enabling the transmission of ultra high-definition digital video and audio over wire runs up to 330 feet (100 meters) using a single CAT type twisted pair cable.^[1]

NOTE: When paired with the HD-TX3-C transmitter^[2], the HD-RX3-C provides a very simple point-to-point solution for extending HDMI along with RS-232 and IR control signals^[3]. For applications using the HD-RX3-C and HD-TX3-C together, please refer to the HD-EXT3-C.

4K Ultra HD Signal Extension

Using HDBaseT technology, the HD-RX3-C allows for the extension of uncompressed HDMI signals over a single CAT type twisted pair cable. In addition to HDMI, it is also compatible with DVI.^[4] Without relying on signal-degrading compression or inferior HDMI signal boosting, HDBaseT reliably transports the full resolution signal from source to display — intact and uncompromised.

The HD-RX3-C handles uncompressed Full HD 1080p, Ultra HD, 2K, and 4K video signals with support for 3D, Deep Color, and HDCP. Audio capabilities include support for high-bitrate 7.1 audio formats like Dolby® TrueHD and DTS-HD Master Audio™ as well as uncompressed linear PCM. All signals are transported over a single CAT type cable, supporting 1080p, WUXGA, and 2K signals at distances up to 330 feet (100 m) using Crestron DM® Ultra or DM 8G® Cable, or third-party CAT5e. Higher resolutions up to UHD and 4K are supported at distances up to 330 feet (100 m) using DM Ultra Cable, 230 feet (70 m) using DM 8G Cable, or 165 feet (50 m) using CAT5e.^[1]



...And Control Too!

When paired with an HD-TX3-C transmitter, the HD-RX3-C provides for the extension of IR and bidirectional RS-232 control signals in addition to video and audio.^[3]

HDBaseT® Certified

Crestron HDMI over HDBaseT products are designed using HDBaseT Alliance specifications, ensuring interoperability with other HDBaseT certified products. Via its HDBaseT input, the HD-RX3-C can be connected directly to an HDBaseT compliant source without requiring a separate transmitter.

Uncompromised and Uncomplicated


Crestron HDMI over HDBaseT products afford a very dependable signal extension solution that's simple to implement. No special configuration or programming is required — just connect your source and display and enjoy high-quality video and audio from across the room — or the other end of the house.

The HD-RX3-C can be mounted discreetly behind a display device or wherever else it needs to go. Linking the HD-RX3-C to an HDBaseT source, or to the HD-TX3-C transmitter^[2], requires just one CAT type cable.^[1] Crestron offers the cable and connectors for a complete, easy, and reliable wiring solution. A range of professional AV interface cables and wall plates is also available to complement the HD-RX3-C for a total custom installation solution.

HD-RX3-C 4K HDMI[®] over HDBaseT[®] Receiver



HD-RX3-C-B – Top, Front & Rear Views

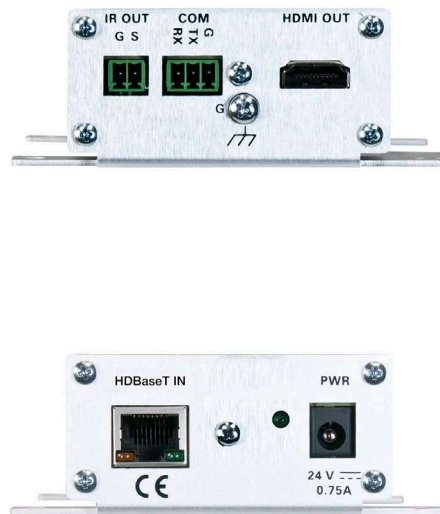

HD-RX3-C-B – Attached to a Rack Rail

SPECIFICATIONS

Maximum HDBaseT[®] Cable Lengths

Cable Type:	DM-CBL-ULTRA DM [®] Ultra Cable	DM-CBL-8G DM 8G [®] Cable	CAT5e (or better) UTP or STP ^[1]
Resolution:			
1080p60 Full HD	330 ft (100 m)	330 ft (100 m)	330 ft (100 m)
1920x1200 WUXGA			
1600x1200 UXGA			
2048x1080 2K DCI			
2560x1440 WQHD	230 ft (70 m)	165 ft (50 m)	
2560x1600 WQXGA			
3840x2160 Ultra HD			
4096x2160 4K DCI			

Video

Input Signal Types: HDBaseT

Output Signal Types: HDMI[®], DVI^[4]

Formats: HDMI & HDBaseT w/Deep Color, 3D, & 4K; DVI; HDCP content protection support

Maximum Resolutions:

Scan Type	Maximum Resolution	Frame Rate	Color Sampling
Progressive	4096x2160 4K DCI	Up to 24 Hz	4:4:4
Progressive	3840x2160 Ultra HD	Up to 30 Hz	4:4:4
Progressive	2560x1600 WQXGA	Up to 60 Hz	4:4:4
Progressive	4096x2160 4K DCI	Up to 60 Hz	4:2:0
Progressive	3840x2160 Ultra HD	Up to 60 Hz	4:2:0
Interlaced	1920x1080 1080i30	Up to 30 Hz	4:4:4

NOTE: Common resolutions are shown; other custom resolutions are supported at pixel clock rates up to 300 MHz

Audio

Input Signal Types: HDBaseT

Output Signal Types: HDMI

Formats: Dolby Digital[®], Dolby Digital EX, Dolby Digital Plus, Dolby[®] TrueHD, DTS[®], DTS-ES, DTS 96/24, DTS-HD High Res, DTS-HD Master Audio[™], up to 8ch PCM

Communications

RS-232: Extends 2-way serial device control signals up to 115.2k baud^[3]

IR: Extends 1-way IR device control signals up to 455 kHz^[3]

HDBaseT: Passes HDCP, EDID, & CEC

HDMI: Passes HDCP, EDID, & CEC

Connectors

IR OUT: (1) 2-pin 3.5mm detachable terminal block;

IR repeater output port^[3];

IR output up to 455 kHz

COM: (1) 3-pin 3.5mm detachable terminal block;

Bidirectional RS-232 port^[3];

Up to 115.2k baud, software handshaking support

G: (1) 6-32 screw, chassis ground lug

HDMI OUT: (1) 19-pin Type A HDMI female;

HDMI digital video/audio output;

Also supports DVI^[4]

HDBaseT IN: (1) 8-pin RJ45 female, shielded;

Connects to the HDBaseT OUT port of an HD-TX3-C transmitter or other HDBaseT device via CAT5e, Crestron DM-CBL-8G, or Crestron DM-CBL-ULTRA cable^[1]

PWR 24VDC 0.75A: (1) 2.1 x 5.5 mm DC power connector;

24 Volt DC power input (PW-2407WU power pack included)^[5]

HD-RX3-C 4K HDMI® over HDBaseT® Receiver

Indicators

PWR: (1) green LED, indicates operating power supplied via local power pack or HD-TX3-C

HDBaseT IN: (2) LEDs, green LED indicates link status, amber LED indicates video and HDCP signal presence

Power Requirements

Power Pack: 0.75 Amp @ 24 Volts DC;
100-240 Volts AC, 50/60 Hz power pack, model PW-2407WU, included ^[5]

Environmental

Temperature: 32° to 104°F (0° to 40°C)

Humidity: 10% to 90% RH (non-condensing)

Heat Dissipation: 11 BTU/hr

Enclosure

Construction: Aluminum w/polycarbonate label overlay and (4) integral mounting flanges

Mounting: Freestanding, surface mount, or attach to a single rack rail

Dimensions

Height: 1.43 in (37 mm)

Width: 3.91 in (100 mm)

Depth: 4.70 in (120 mm)

Weight

11.6 oz (330 g)

MODELS & ACCESSORIES

Available Models

HD-RX3-C-B: 4K HDMI® over HDBaseT® Receiver, Black Just Released
(International orders may require up to 30 days)

Included Accessories

PW-2407WU: Wall Mount Power Pack 24VDC, 0.75A, Universal
(Qty. 1 included)

Available Accessories

HD-TX3-C: 4K HDMI® over HDBaseT® Transmitter

DM-CBL-ULTRA-NP: DigitalMedia™ Ultra Cable, Non-Plenum Type CMR

DM-CBL-ULTRA-P: DigitalMedia™ Ultra Cable, Plenum Type CMP

DM-CBL-ULTRA-LSZH: DigitalMedia™ Ultra Cable, Low Smoke Zero Halogen

DM-CONN: Connector for DM-CBL-ULTRA

DM-CBL-8G-NP: DigitalMedia 8G™ Cable, non-plenum

DM-CBL-8G-P: DigitalMedia 8G™ Cable, plenum

DM-8G-CONN-WG: Connector with Wire Guide for DM-CBL-8G

DM-8G-CRIMP-WG: Crimping Tool for DM-8G-CONN-WG

DM-8G-CONN: Connector for DM-CBL-8G

DM-8G-CRIMP: Crimping Tool for DM-8G-CONN

IRP2: IR Emitter Probe w/Terminal Block Connector

CNSP-XX: Custom Serial Interface Cable

CBL Series: Crestron® Certified Interface Cables

MP-WP Series: Media Presentation Wall Plates

Notes:

1. The maximum cable length for HDBaseT is dependent upon the type of cable and resolution of the video signal. Refer to the "Maximum HDBaseT Cable Lengths" table for a detailed overview. Shielded cable and connectors are recommended to safeguard against unpredictable environmental electrical noise which may impact performance at resolutions above 1080p. All wire and cables are sold separately.
2. HD-TX3-C sold separately or as part of the [HD-EXT3-C](#) 4K HDMI® over HDBaseT Extender package.
3. IR and RS-232 control signals are only supported when paired with an HD-TX3-C transmitter.
4. HDMI requires an appropriate adapter or interface cable to accommodate a DVI signal. [CBL-HD-DVI](#) interface cables are available separately.
5. When the HD-RX3-C receiver is connected to a HD-TX3-C transmitter, only one power pack should be connected to either the receiver or the transmitter, not both. Power is passed to the secondary device via the HDBaseT connection. Please note, the HD-RX3-C and HD-TX3-C are not PoH compatible. They cannot be powered by, or supply power to, another HDBaseT device. They may however be connected to such devices without risk of malfunction.

This product may be purchased from an authorized Crestron dealer. To find a dealer, please contact the Crestron sales representative for your area. A list of sales representatives is available online at www.crestron.com/salesreps or by calling 800-237-2041.

The specific patents that cover Crestron products are listed online at: patents.crestron.com.

Crestron, the Crestron logo, DigitalMedia, DigitalMedia 8G, DM, and DM 8G are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Dolby and Dolby Digital are either trademarks or registered trademarks of Dolby Laboratories in the United States and/or other countries. DTS, DTS-HD, and DTS-HD Master Audio are either trademarks or registered trademarks of DTS, Inc. in the United States and/or other countries. HDBaseT and the HDBaseT Alliance logo are either trademarks or registered trademarks of the HDBaseT Alliance in the United States and/or other countries. HDMI and the HDMI Logo are either trademarks or registered trademarks of HDMI Licensing LLC in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography. Specifications are subject to change without notice. ©2015 Crestron Electronics, Inc.

