


#5614

METALLIZED POLYPROYLLENE CAPACITORS

PPM 600-133 df J

Preliminary
datasheet

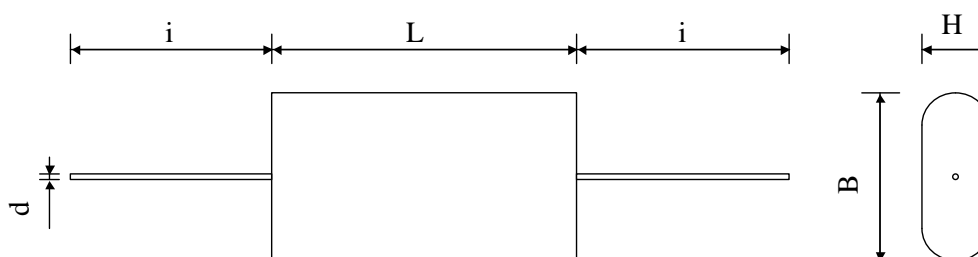

Dielectric of metallized polypropylene

Plastic sleeve / Epoxy resin sealing

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		0.033	μF	1 V / 1 kHz
Tolerance			± 5	%	
Rated voltage	Un DC		6000	VDC	
Rated voltage	Un AC		3300	Veff	
RMS current	I RMS max.			Aeff	10 kHz
slope of voltage variation	du/dt max.			V/ μsec	max. repetitive
Repetitive surge current	I cr. max			A	
Tangente delta	tg δ		≤ 5	10^{-4}	1 V / 1 kHz
Tangente delta	tg δ		≤ 5	10^{-4}	1 V / 10 kHz
Stray inductance	ESL		≤ 50	nH	
Insulation resistance	Ri		$> 100\,000$	M Ω	100 VDC - 1 min
Test voltage between terminals	U T1		9000	VDC	10 s
Climatic category			40/85/56		
Estimated operational life (-3%)			100\,000	h	Un DC / 70°C
Dimension	Symbol			Unit	Conditions
Width	B max		37	mm	
Height	L max		78	mm	
Length	H max		22	mm	
Terminals					
Axial tinned wire	d		$\varnothing 1.0 \times 30$	mm	
	M1				
	M0				
	Modification	Date	Visa émetteur		

Condensateurs CH 1401 Yverdon-les-Bains
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Le Janché
Capacitors
A FISCHER & TALSCHER COMPANY

HJJ

21.11.2006

faisab5614.XLS