


DATASHEET 1311-B-20V20C80

Output:

- Voltage: -20 V ... 20 V

- Current: -80 A ... 80 A

- Power: 1600 W

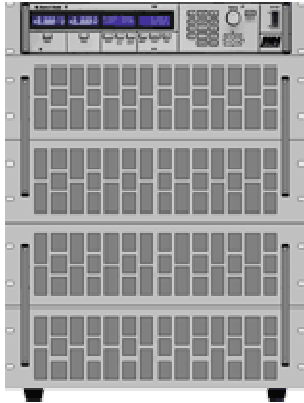

The specified accuracies refer to an ambient temperature of 25°C ±5°C.

The specified accuracies are valid when the unit is connected to undisturbed voltages (Ripple and Noise <0.1%). At voltages with higher disturbance values the accuracy can change for the worse.

Accuracy of Setting

	of setting	of corresponding range
Voltage	±0.1%	±0.05%
Current	±0.2%	±0.05%
Voltage Limitation	±0.1%	±0.05%
Current Limitation	±0.2%	±0.05%
Resolution Setting		16 Bit
Ripple		±0.05% RMS of range
Load Effect 0-100%		0.1%
Line Effect AC ±10%		0.02%

Accuracy of Display:

	of measured value (real value)	of corresponding range
Voltage	$\pm 0.1\%$	$\pm 0.05\%$
Current	$\pm 0.2\%$	$\pm 0.05\%$
Resistance	Quotient of voltage and current	
Power	Product of voltage and current	

Accuracy of Analog Programming:

-5V ... 0 ... 5V / -10V ... 0 ... 10V for Current, Voltage

	of setting	of corresponding range
Voltage	$\pm 0.2\%$	$\pm 0.15\%$
Current	$\pm 0.4\%$	$\pm 0.15\%$
Voltage Limitation * (upper and lower)	$\pm 0.2\%$	$\pm 0.15\%$
Current Limitation * (upper and lower)	$\pm 0.4\%$	$\pm 0.15\%$

* only -10V ... 0 ... +10V

Input impedance of the analog inputs: > 10k Ω
GND max. $\pm 2V$ against negative output terminal¹⁾

Accuracy of Analog Monitor Outputs:

-10V ... 0 ... 10V for Current, Voltage

	of analog signal of the real value	offset voltage
Voltage	$\pm 0.1\%$	$\pm 15mV$
Current	$\pm 0.2\%$	$\pm 15mV$

GND max. $\pm 2V$ against negative output terminal¹⁾
Minimum loading capacity 2k Ω

Accuracy of Measurement, Reading via Data Interface:

	of measured value (real value)	of corresponding range
--	-----------------------------------	---------------------------

Voltage	±0.1%	±0.05%
Current	±0.2%	±0.05%
Resolution Measurement	18 Bit	
Reading Rate (free running)	330ms not triggerable	

Accuracy of Measurement, Reading via Data Interface: NL13 Option

	of measured value (real value)	of corresponding range
Voltage	±0.15%	±0.07%
Current	±0.3%	±0.07%
Resolution Measurement	13 Bit	
Reading Rate	min. 200µs (in memory) triggerable	

Power

Nominal Power	up to $T_A = 21\text{ °C}$
Derating	-1.2% / °C for $T_A > 21\text{ °C}$

Input Impedance > 50 kΩ in standby

Operating Temperature 5°C ... 40°C

External Control Functions
 Stand-by
 Trigger input and output
 Mode switching
 Emergency shutdown

Protection Equipment
 Current and voltage limitation
 Over-temperature deactivation

Rise and Fall Time ²⁾ **200 µs**

Parallel Operation up to 3 devices in master-slave operation
 (hardware-controlled in current mode only)

Cooling Current and temperature-controlled fans

Dimension³⁾, Weight **19" / 14 HU, 105 kg**

Mains Supply **230 VAC ± 10%**
50 ... 60Hz

Power Consumption **2900 VA**

Electric Safety **DIN EN 61010-1**

EMC, CE-Mark **DIN EN 61326-1**
DIN EN 61000-3-2
DIN EN 61000-3-3

Measuring Device Category **CAT I**

Permissible Operating Voltages: Negative Output Terminal- Case

±125V DC

**Permissible Operating Voltages:
Analog Interface - Negative Output Terminal**

Standard ±2V DC

with NL06 Option ±125V DC

Colour

Front Panel RAL7032 (pebble grey)

Sides, Lid RAL7037 (stone grey)

1) ±125V with NL06 Option

2) Rise and fall times are defined as 10%...90% and 90%...10% of the maximum current (measured in constant current mode - FAST)

3) 1HU = 44.45mm