

GLASS PASSIVATED RECTIFIERS

VOLTAGE RANGE: 50 --- 1000 V

CURRENT: 1.0 A


FEATURES

- ◇ Low cost
- ◇ Glass passivated junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with Freon,Alcohol,Isopropanop and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

MECHANICAL DATA

- ◇ Case:JEDEC DO-41,molded plastic
- ◇ Terminals: Axial lead ,solderable per ML- STD-202,Method 208
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.012ounces,0.34grams
- ◇ Mounting position: Any

DO - 41

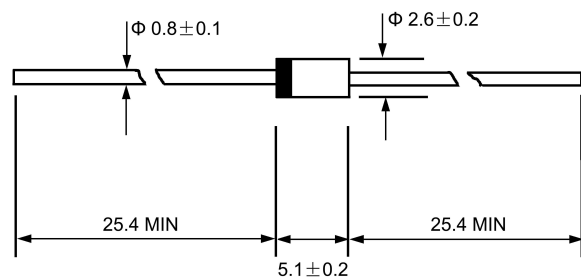

Dimensions in millimeters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase,half wave,60 Hz,resistive or inductive load. For capacitive load,derate by 20%.

		HER 101G	HER 102G	HER 103G	HER 104G	HER 105G	HER 106G	HER 107G	HER 108G	UNITS
Maximum recurrent peak reverse voltage	V _{RRM}	50	100	200	300	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	35	70	140	210	280	420	560	700	V
Maximum DC blocking voltage	V _{DC}	50	100	200	300	400	600	800	1000	V
Maximum average forward rectified current 9.5mm lead length, @T _A =75°C	I _{F(AV)}	1.0								A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @T _J =125°C	I _{FSM}	30.0								A
Maximum instantaneous forward voltage @1.0 A	V _F	1.0			1.3		1.7			V
Maximum reverse current @T _A =25°C at rated DC blocking voltage @T _A =100°C	I _R	5.0 100.0								μ A
Maximym reverse capacitance (Note1)	t _{rr}	50					75			ns
Typical junction capacitance (Note2)	C _J	20					15			pF
Typical thermal resistance (Note3)	R _{θJA}	60.0								°C/W
Operating junction temperature range	T _J	- 55---- +175								°C
Storage temperature range	T _{STG}	- 55---- +175								°C

NOTE:1. Measured with $I_F=0.5A$, $I_R=1A$, $I_{rr}=0.25A$.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance from junction to ambient.

www.galaxycn.com

FIG.1 –FORWARD DERATING CURVE

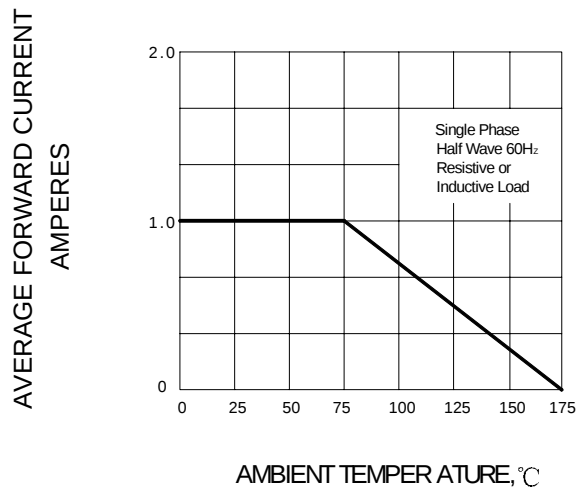


FIG.2 –TYPICAL REVERSE CHARACTERISTICS

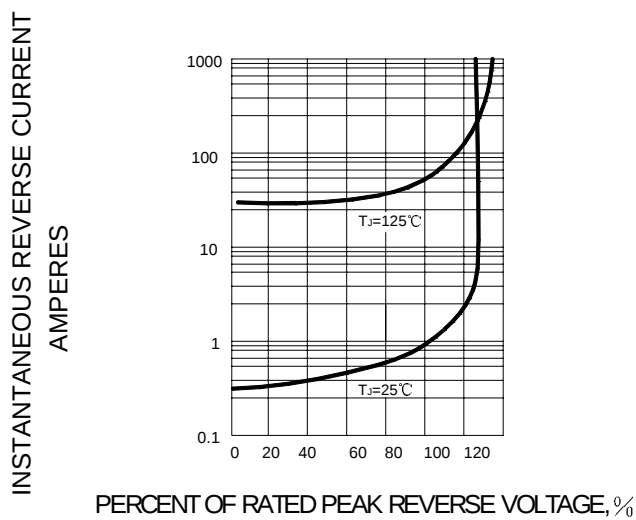


FIG.3 –TYPICAL FORWARD CHARACTERISTICS

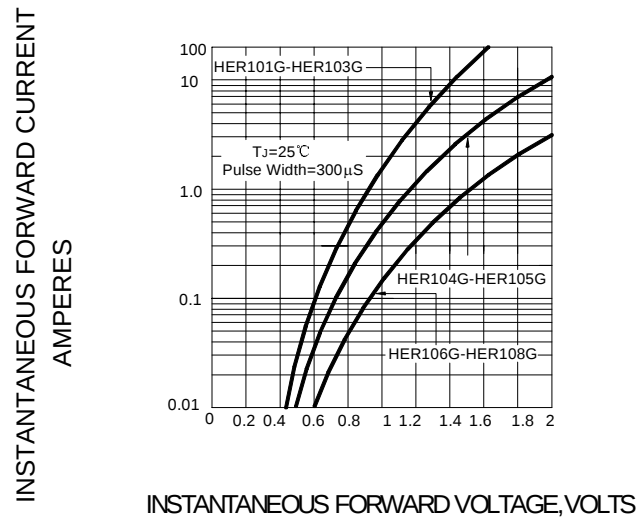


FIG.4–PEAK FORWARD SURGE CURRENT

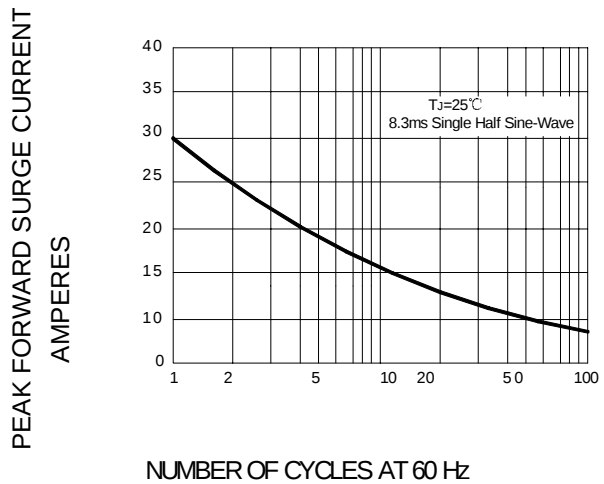


FIG.5–TYPICAL JUNCTION CAPACITANCE

