



Frontier Electronics Corp.

667 E. COCHRAN STREET, SIMI VALLEY, CA 93065

TEL: (805) 522-9998 FAX: (805) 522-9989

E-mail: frontiersales@frontierusa.com

Web: <http://www.frontierusa.com>

2A GENERAL PURPOSE PLASTIC RECTIFIER


GP20-005 THRU GP20-10

FEATURES

- LOW FORWARD VOLTAGE
- HIGH CURRENT CAPABILITY
- LOW LEAKAGE CURRENT
- HIGH SURGE CAPABILITY

MECHANICAL DATA

- CASE: DO15, MOLDED PLASTIC USE UL 94V-0 RECOGNIZED FLAME RETARDANT EPOXY, DIMENSIONS IN INCHES AND (MILLIMETERS)
- TERMINAL: AXIAL LEADS, SOLDERABLE PER MIL-STD-202 METHOD 208
- POLARITY: COLOR BAND DENOTES CATHODE
- MOUNTING POSITION : ANY
- WEIGHT: 0.4 GRAMS

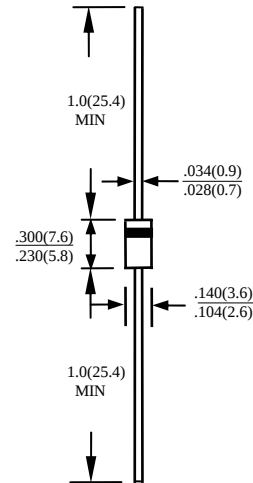

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS RATINGS AT 25°C AMBIENT TEMPERATURE UNLESS OTHERWISE SPECIFIED
SINGLE PHASE, HALF WAVE, 60 HZ, RESISTIVE OR INDUCTIVE LOAD. FOR CAPACITIVE LOAD, DERATE CURRENT BY 20%

RATINGS	SYMBOL	GP20-005	GP20-01	GP20-02	GP20-04	GP20-06	GP20-08	GP20-10	UNITS
MAXIMUM RECURRENT PEAK REVERSE VOLTAGE	V_{RRM}	50	100	200	400	600	800	1000	V
MAXIMUM RMS VOLTAGE	V_{RMS}	35	70	140	280	420	560	700	V
MAXIMUM DC BLOCKING VOLTAGE	V_{DC}	50	100	200	400	600	800	1000	V
MAXIMUM AVERAGE FORWARD RECTIFIED CURRENT 0.375"(9.5mm) LEAD LENGTH AT $T_A=55^{\circ}\text{C}$	I_O	2.0							A
PEAK FORWARD SURGE CURRENT, 8.3ms SINGLE HALF SINE-WAVE SUPERIMPOSED ON RATED LOAD	I_{FSM}	70							A
TYPICAL THERMAL RESISTANCE (NOTE 2)	$R_{\theta ja}$	25							$^{\circ}\text{C/W}$
OPERATING TEMPERATURE RANGE	T_{OP}	-55 TO + 175							$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS (A_T $T_A=25^{\circ}\text{C}$ UNLESS OTHERWISE NOTED)

CHARACTERISTICS	SYMBOL	GP20-005	GP20-01	GP20-02	GP20-04	GP20-06	GP20-08	GP20-10	UNITS
MAXIMUM FORWARD VOLTAGE AT I_O DC	V_F	1.1							V
MAXIMUM REVERSE CURRENT AT 25°C	I_R	5							μA
MAXIMUM REVERSE CURRENT AT 100°C	I_R	50							μA

NOTE: 1. MEASURED AT 1MHZ AND APPLIED REVERSE VOLTAGE OF 4.0 VOLTS

2. BOTH LEADS ATTACHED TO HEAT SINK 35×35×1t(mm) COPPER PLATE AT LEAD LENGTH 5mm

RATINGS AND CHARACTERISTIC CURVE GP20-005 THRU GP20-10

FIG. 1 - FORWARD CURRENT DERATING CURVE

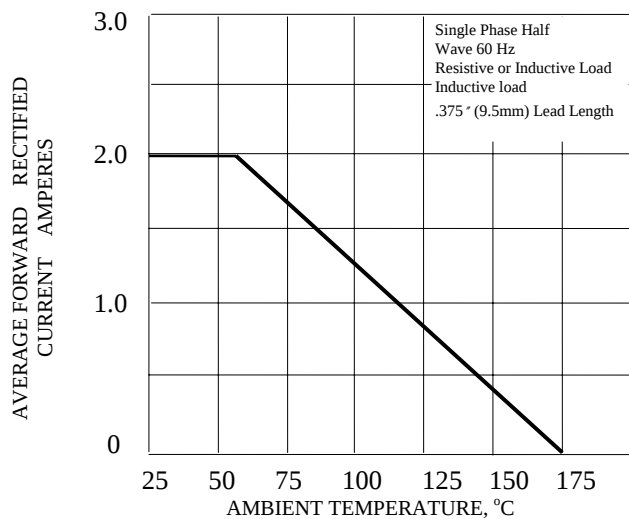


FIG. 2 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

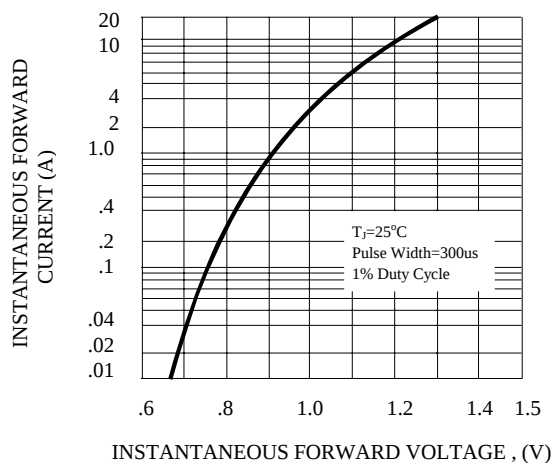


FIG. 3 - PEAK FORWARD SURGE CURRENT

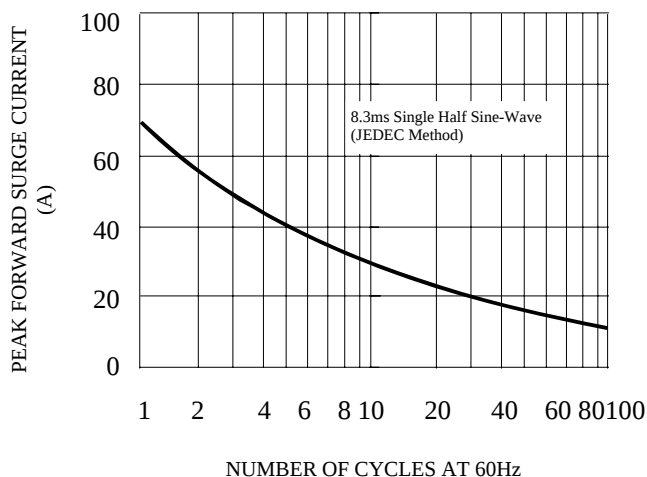


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

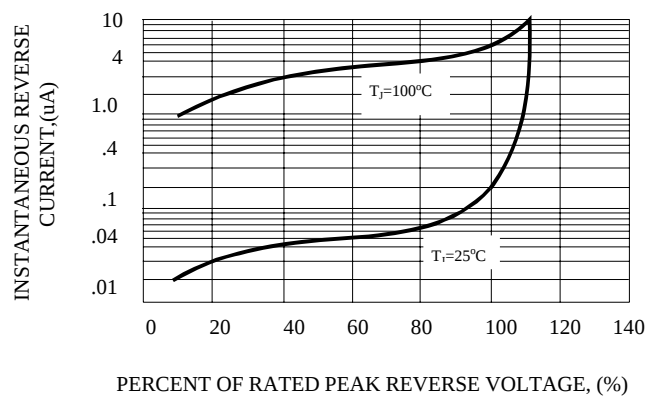


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

