

Linear Polarity RFID Panel Antenna

PAV90209H



902-928 MHz 9 dBi LINEAR POLARITY PANEL

The Laird Technologies' PAV90209H antenna is a linearly polarized panel antenna that provides reception and transmission of signals in the 902-928 MHz frequency band. Laird Technologies' industry-renowned design methodology achieves maximum efficiency and performance across the entire frequency band.

Both VSWR and efficiency are excellent and allow the user to achieve the maximum performance for an antenna of this type. The antenna is housed in a heavy duty radome enclosure that can be directly wall mounted. An optional articulating mount allows either wall or mast mounting. The antenna is offered with an integrated fixed connector with a variety of connector types or with coax cable.

FEATURES

- Low profile
- Extremely low VSWR and high efficiency
- Weather and UV resistant radome
- Wide range of connector options
- IP67 Enclosure

APPLICATIONS

- Warehouse
- Distribution center
- Airports and hospitals
- Transit terminals
- Conveyor belt

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +44.(0).1628.858941
IAS-EUSales@lairdtech.com

Asia: +86.21.5855.0827.127
IAS-AsiaSales@lairdtech.com

www.lairdtech.com


Linear Polarity RFID Panel Antenna

PAV90209H

SPECIFICATIONS

Antenna Part Number	PAV90209H
Frequency Range	902 - 928 MHz
Gain	9 dBi
Maxium VSWR	1.3:1
3 dB Beamwidth - Azimuth	70°
Front to Back Ratio	18 dB
Polarization	Linear
Maxium Input Power	10 Watts
Input Impedence	50 Ohms
Weight	2.3 lbs (1.04 Kg)
Mechanical Size	10.2" x 10.2" x 1.32"
Antenna Connection	Fixed, Type N Female / Coax Pigtail, N Male
Radome	High Strength PC
Mount Style	Threaded Stud
Temperature Operational	-30°C to +70°C
Temperature Storage	-40°C to +85°C
Ingress Protection	(Fixed N) IP67/(Pigtail) IP54
Lightning Protection	DC Grounded

ANTENNA PATTERNS

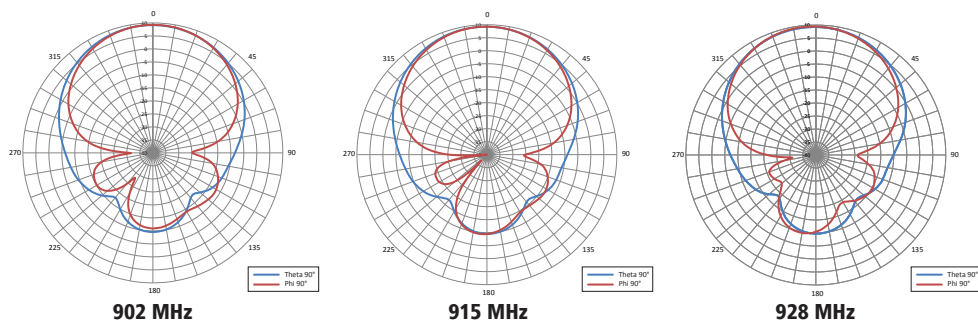

ORDERING GUIDE

Part Number	Specifications
PAV90209H-91NM	902-928 MHz panel, Linear, 9 dBi, 91 cm, N Male
PAV90209H-FNF	902-928 MHz panel, Linear, 9 dBi, Fixed, Type N Female

ANT-DS-PAV90209H 0214

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2013 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trade marks or registered trade marks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.