



Smart Technology. Delivered.

Circular Polarity RFID Panel Antenna

S9028PCLF S9028PCRF



902-928 MHz 9 dBiC CIRCULAR POLARITY PANEL

The Laird S9028PCLF antenna is a circularly polarized panel antenna that provides reception and transmission of signals in the 902-928 MHz frequency band. Laird's industry-renowned design methodology achieves maximum efficiency and performance across the entire frequency band.

Both VSWR and axial ratios are excellent and allow the user to achieve the maximum performance for an antenna of this type. The antenna is housed in a heavy duty radome enclosure that can be directly wall mounted, An optional articulating mount allows either wall or mast mounting.

The antenna is offered with an integrated coax pigtail and a variety of connector types are available.

FEATURES

- Low profile
- Extremely low VSWR and axial ratio
- Weather and UV resistant radome
- Wide range of connector and cable options
- Left hand and right hand CP versions
- Mounts flush to wall

APPLICATIONS

- Warehouse
- Distribution center
- Airports and hospitals
- Transit terminals
- Conveyer belt

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +44.1628.858941
IAS-EUSales@lairdtech.com

Asia: +86.21.5855.0827.127
IAS-AsiaSales@lairdtech.com

www.lairdtech.com




Smart Technology. Delivered.

Circular Polarity RFID Panel Antenna

S9028PCLF S9028PCRF

SPECIFICATIONS

Antenna Part Number	S9028PCLF / S9028PCRF
Frequency Range	902 - 928 MHz
Gain	9 dBic
Maxium VSWR	1.3:1
3 dB Beamwidth - Azimuth	70°
Front to Back Ratio	20 dB
Polarization	Circular Right or Left
Maxium Input Power	10 Watts
Input Impedence	50 Ohms
Axial Ratio	1dB Typical
Weight (Kg)	2.3 lbs (1.04)
Mechanical Size	10.2" x 10.2" x 1.32"
Antenna Connection	Coax Pigtail, Rev TNC Male (others available)
Radome	High Strength PC
Mount Style	Flush mount to wall
Temperature Operational	-25°C to +70°C
Lightning Protection	DC Grounded
Environmental Rating	IP 54

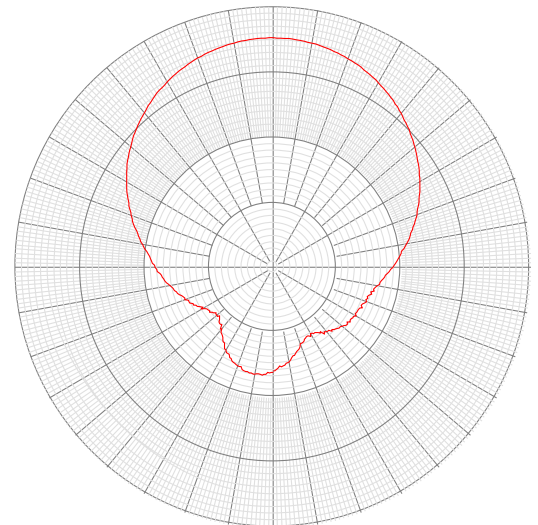

915 MHz

Americas: +1.847 839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +44.1628.858941
IAS-EUSales@lairdtech.com

Asia: +86.21.5855.0827.127
IAS-AsiaSales@lairdtech.com

www.lairdtech.com

ANT-DS-S9028PCLF S9028PCRF 0115

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2015 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trade marks or registered trade marks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.