

The **DEETER** Group®

LVCS HE Continuous Level Sensor



The LVCS HE is a liquid level sensor with a loop-powered 4-20mA output.

The LVCS HE has one moving part; a stainless steel float, which passes over sensors in a stainless steel stem with a sensing resolution of 15mm. It is designed to fit into a 21mm hole in the top of a tank, secured by an aluminium head. The standard head has a ½ inch BSP thread, for other threads or for fitting to pressured tanks, please call the sales office.

All fittings inside the tank are made from stainless steel 316L and are welded to make a tough and durable sensor. The LVCS is therefore ideally suited for use in food and petrochemical applications, and for use in harsh environments.

Custom lengths can be made to order – call our sales office to discuss your requirements. We will consider custom lengths, process connections and other resolutions.

The LVCS HE is an economical alternative to the Deeter standard LVCS and is suited to longer lengths. Other differences include:

Deeter House
Valley Road
Hughenden Valley
Bucks HP14 4LW

Tel: +44 (0)1494 566 046
Fax: +44 (0)1494 563 961
Email: sales@deeter.co.uk




www.deeter.co.uk

The DEETER Group®

LVCS HE Continuous Level Sensor

	Standard LVCS	LVCS HE
Resolution	5mm	15mm
Power supply	Separate Inputs	Loop Powered
Temperature range	-20C to +120C	-20C to +45C
Voltage output options	Yes	No
IP Rating	IP67	IP67
(Further details about the standard LVCS can be found on the website (www.deeterelectronicsinc.com) and by downloading a data sheet)		

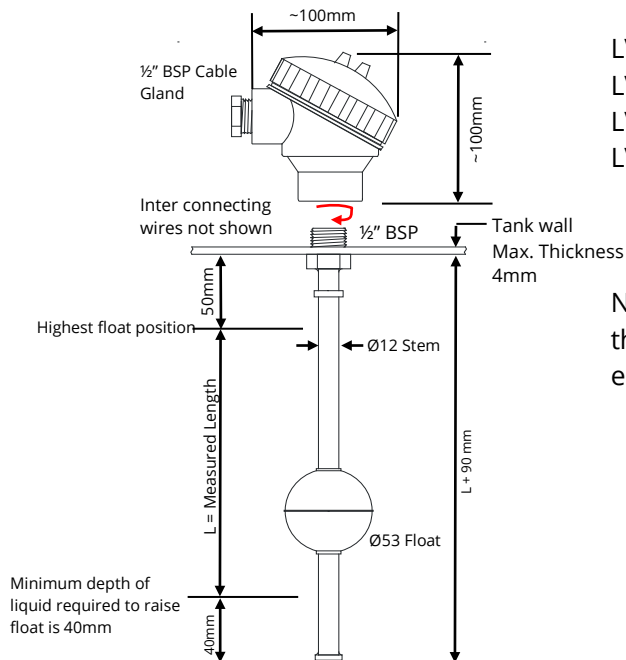

LVCS HE 5: Measured length L = 1250mm
 LVCS HE 6: Measured length L = 1500mm
 LVCS HE 7: Measured length L = 1750mm
 LVCS HE 8: Measured length L = 2000mm

Note: The overall length is 90mm longer than the measuring length. Please check you have enough tank depth to accommodate.

Specification

Deeter House
 Valley Road
 Hughenden Valley
 Bucks HP14 4LW

Tel: +44 (0)1494 566 046
 Fax: +44 (0)1494 563 961
 Email: sales@deeter.co.uk



www.deeter.co.uk

The DEETER Group®


LVCS HE Continuous Level Sensor

Current Loop Supply Voltage	10VDC* - 30VDC	Maximum Current Loop Load Resistance	50ohms - 1kohms#
Current Loop Output	4-20mA	Temperature Range	-20 °C to 45 °C
Sensing Resolution	15mm	Connection Type	2-way screw terminal
Operating Pressure	450 PSI 31 Bar	Float Specific Gravity	0.65

* The minimum supply voltage is given by the formula: $V_{\text{supply}(\text{min})} = (R_{\text{load}} \times 20\text{mA}) + 9\text{V}$, where R_{load} includes wiring resistance.

* Maximum load resistance (including wiring resistance) is given by the formula: $R_{\text{load}(\text{max})} = (V_{\text{supply}} - 9\text{V})/20\text{mA}$

Ordering Information

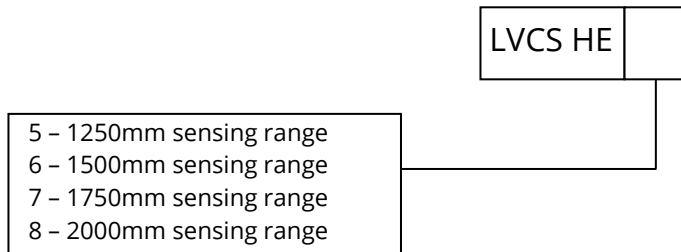

All electrical equipment should be installed by a qualified/certified electrician.

The Deeter Group follows a policy of continual development of its products and reserves the right to change specifications and/or features without notice.

Deeter House
Valley Road
Hughenden Valley
Bucks HP14 4LW

Tel: +44 (0)1494 566 046
Fax: +44 (0)1494 563 961
Email: sales@deeter.co.uk



www.deeter.co.uk