

Customer Information Sheet

DRAWING No.: M83-LFDIF6NXX-0000-000

SHEET 2 OF 2


IF IN DOUBT - ASK

©

NOT TO SCALE

THIRD ANGLE PROJECTION


ALL DIMENSIONS IN mm

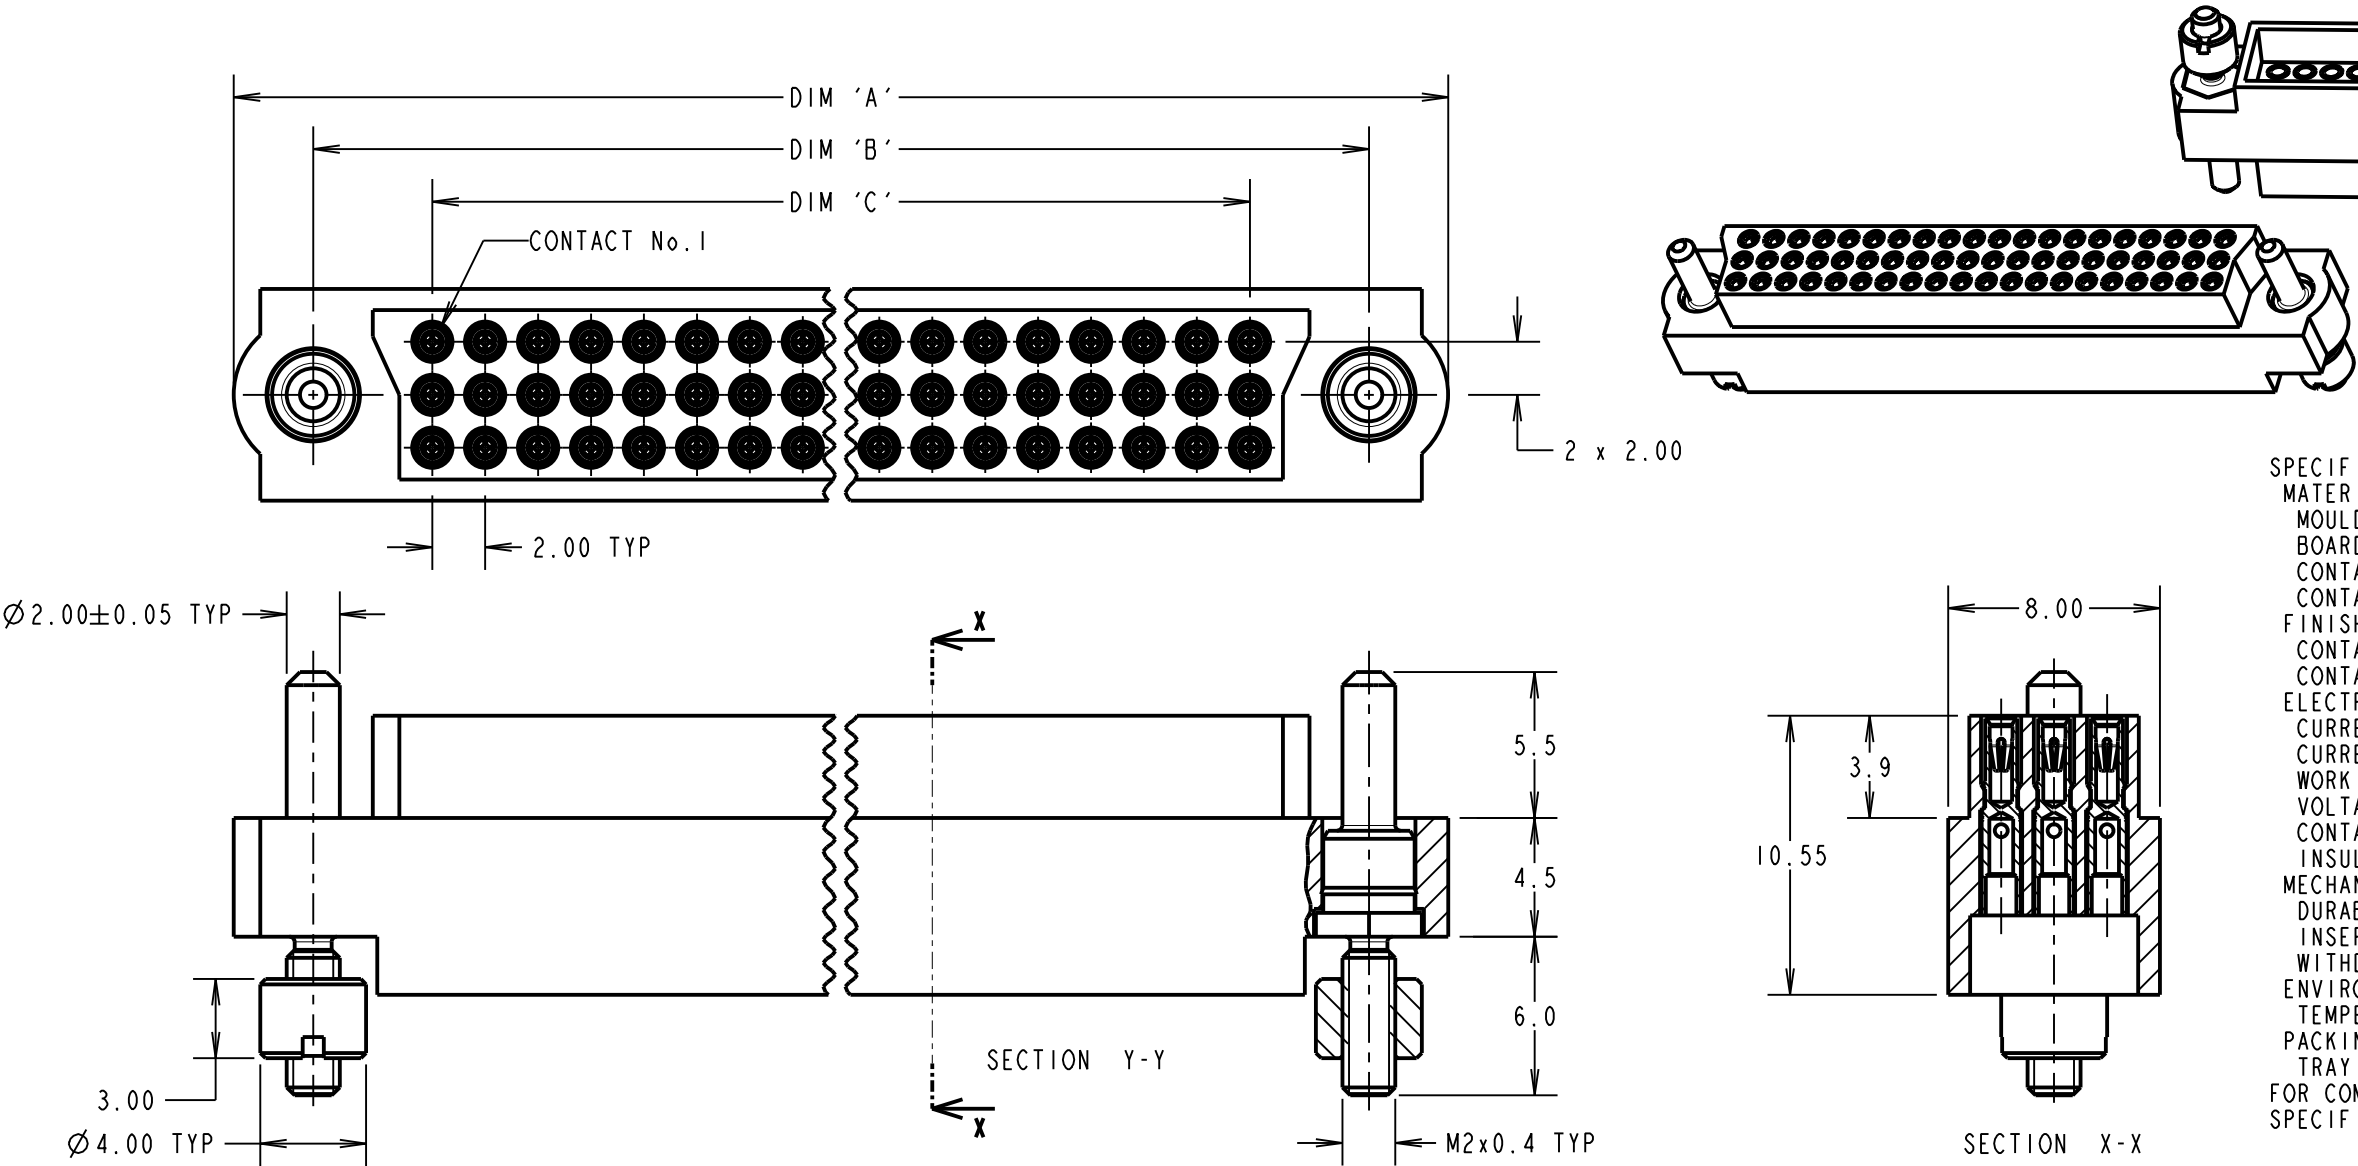

SPECIFICATIONS:
MATERIAL:
MOULDING = GLASS-FILLED PPS, UL94V-0, BLACK
BOARD MOUNT GUIDE PIN = STAINLESS STEEL
CONTACT CLIP = BERYLLIUM COPPER
CONTACT SHELL = BRASS
FINISH:
CONTACT CLIP = 0.3µ GOLD
CONTACT SHELL = 0.25-0.3µ GOLD
ELECTRICAL:
CURRENT RATING AT 25°C = 3.0A MAX
CURRENT RATING AT 85°C = 2.2A MAX
WORKING VOLTAGE = 800V AC/DC
VOLTAGE PROOF = 1200V AC/DC
CONTACT RESISTANCE = 25 mΩ MAX
INSULATION RESISTANCE = 100 MΩ MIN
MECHANICAL:
DURABILITY = 500 OPERATIONS
INSERTION FORCE = 1.0N MAX
WITHDRAWAL FORCE = 0.2N MIN
ENVIRONMENTAL:
TEMPERATURE RANGE = -55°C TO +125°C
PACKING:
TRAY
FOR COMPLETE SPECIFICATION, SEE COMPONENT SPECIFICATION C005XX (LATEST ISSUE)

- NOTES:
- CONNECTORS ARE SUPPLIED WITH CONTACTS AND BOARD MOUNT NUTS LOOSE.
 - FOR EXTRA CONTACTS, USE PART NUMBER M83-0110005.
 - RECOMMENDED WIRE TYPE = BS 3G 210 TYPE A, PTFE INSULATED 22 AWG. MAX INSULATION DIAMETER = Ø1.10mm, STRIP WIRE BY 2.00mm.
 - RECOMMENDED HAND CRIMP TOOL = M22520/2-01 WITH POSITIONER T5747, SEE INSTRUCTION SHEET IS-01 FOR CRIMPING INSTRUCTIONS.
 - CONTACT INSERTION AND EXTRACTION TOOL = Z80-280, SEE INSTRUCTION SHEET IS-25 FOR ASSEMBLY INFORMATION.

DIMENSION	CALCULATION
DIM 'A'	((TOTAL No. OF CONTACTS /3) x2) +13
DIM 'B'	((TOTAL No. OF CONTACTS /3) x2) +7
DIM 'C'	((TOTAL No. OF CONTACTS /3) x2) -2
DIM 'D'	((TOTAL No. OF CONTACTS /3) x2) +2.7
EXAMPLE: CONNECTOR WITH 27 CONTACTS, M83-LFDIF6N27-0000-000 DIM 'A' = 31.00, DIM 'B' = 25.00, DIM 'C' = 16.00	

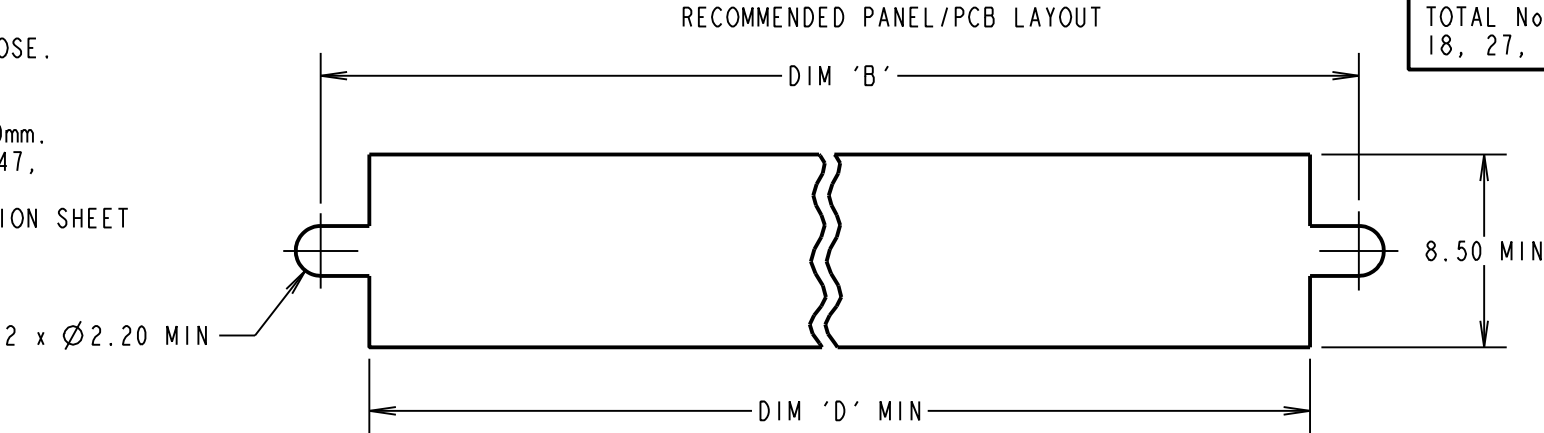

ORDER CODE:
M83-LFDIF6NXX-0000-000
TOTAL No. OF CONTACTS
18, 27, 36, 51, 54, 60, 72, 96

MGP	1	22.05.12	----
NAME	ISS.	DATE	C/NOTE
APPROVED: MGP			
CHECKED: WJB			
DRAWN: MARK PLESTED			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN
www.harwin.com
technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
X. = ±1mm
X.X = ±0.25mm
X.XX = ±0.10mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH:

SEE ABOVE

S/AREA:

mm²

TITLE:

JACKSCREW DATAMATE
3-ROW CRIMP FEMALE ASSY

DRAWING NUMBER:

M83-LFDIF6NXX-0000-000

SHT
2 OF 2