

SCHOTTKY RECTIFIER
HIGH EFFICIENCY SERIES

30CLJQ150
JANS1N7058CCU3
JANTX1N7058CCU3
JANTXV1N7058CCU3

30Amp, 150V
Ref: MIL-PRF-19500/731


Major Ratings and Characteristics

Characteristics	1N7058CCU3	Units
$I_{F(AV)}$	30	A
V_{RRM} (Per Leg)	150	V
I_{FSM} @ $t_p = 8.3ms$ half-sine (Per Leg)	130	A
V_F @ 15Apk, $T_J = 125^\circ C$ (Per Leg)	0.85	V
T_J, T_{stg} Operating and storage	-65 to 150	$^\circ C$

Description/Features

The 1N7058CCU3 center tap Schottky rectifier has been expressly designed to meet the rigorous requirements of high reliability environments. It is packaged in the hermetic surface mount SMD-0.5 ceramic package. The device's forward voltage drop and reverse leakage current are optimized for the lowest power loss and the highest circuit efficiency for typical high frequency switching power supplies and resonant power converters. Full MIL-PRF-19500 quality conformance testing is available on source control drawings to TX, TXV and S quality levels.

- Hermetically Sealed
- Center Tap
- Low Forward Voltage Drop
- High Frequency Operation
- Guard Ring for Enhanced Ruggedness and Long term Reliability
- Surface Mount
- Lightweight

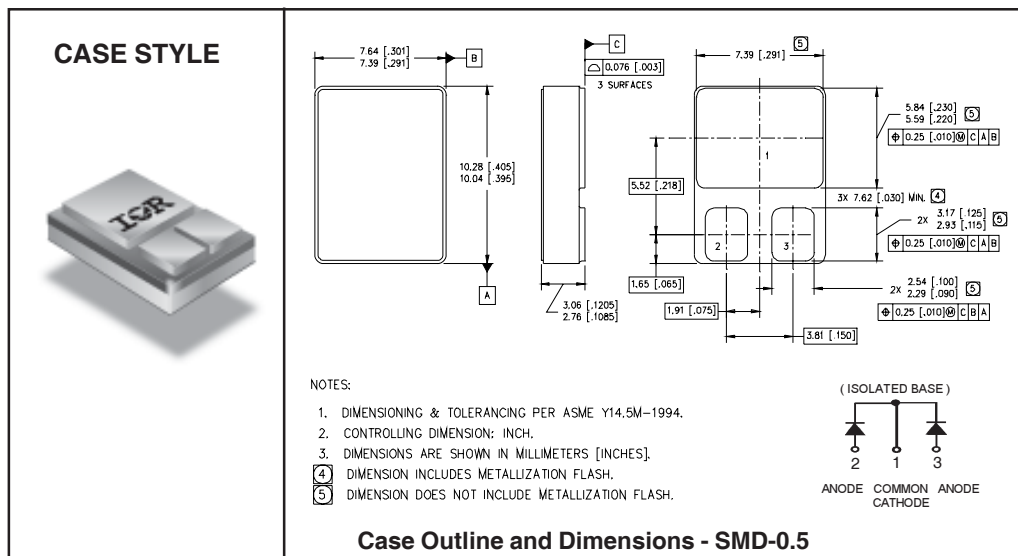

Voltage Ratings

Part number	1N7058CCU3
V _R Max. DC Reverse Voltage (V) (Per Leg)	150
V _{RWM} Max. Working Peak Reverse Voltage (V) (Per Leg)	

Absolute Maximum Ratings

Parameters	Limits	Units	Conditions
I _{F(AV)} Max. Average Forward Current (Per Leg) See Fig. 5	15	A	50% duty cycle @ T _C = 92°C, square waveform
I _{FSM} Max. Peak One Cycle Non - Repetitive Surge Current (Per Leg)	130	A	@ t _p = 8.3ms half-sine

Electrical Specifications

Parameters	Limits	Units	Conditions
V _{FM} Max. Forward Voltage Drop (Per Leg) See Fig. 1①	1.06	V	@ 7.5A T _J = -55°C
	1.23	V	@ 15A
	1.05	V	@ 7.5A T _J = 25°C
	1.20	V	@ 15A
	0.72	V	@ 7.5A T _J = 125°C
I _{RM} Max. Reverse Leakage Current (Per Leg) See Fig. 2①	0.02	mA	T _J = 25°C V _R = rated V _R
	7.0	mA	T _J = 125°C
C _T Max. Junction Capacitance (Per Leg)	130	pF	V _R = 5V _{DC} (1MHz, 25°C)
L _S Typical Series Inductance (Per Leg)	4.8	nH	Measured from center of cathode pad to center of anode pad

Thermal-Mechanical Specifications

Parameters	Limits	Units	Conditions
T _J Max. Junction Temperature Range	-65 to 150	°C	
T _{stg} Max. Storage Temperature Range	-65 to 150	°C	
R _{thJC} Max. Thermal Resistance, Junction to Case (Per Leg)	3.5	°C/W	DC operation See Fig. 4
R _{thJC} Max. Thermal Resistance, Junction to Case (Per Package)	1.75	°C/W	DC operation
wt Weight (Typical)	1.0	g	
Die Size (Typical)	70X92	mils	
Case Style	SMD-0.5		

① Pulse Width < 300μs, Duty Cycle < 2%

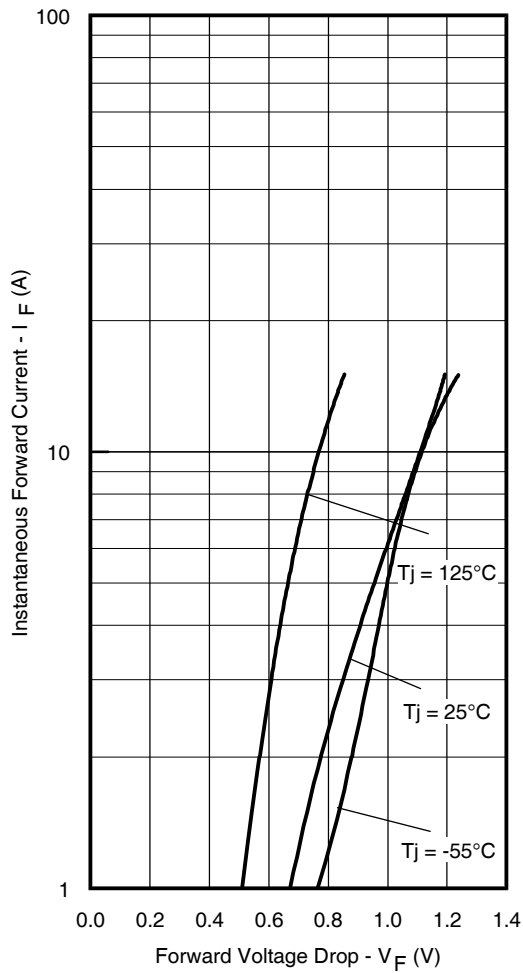


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

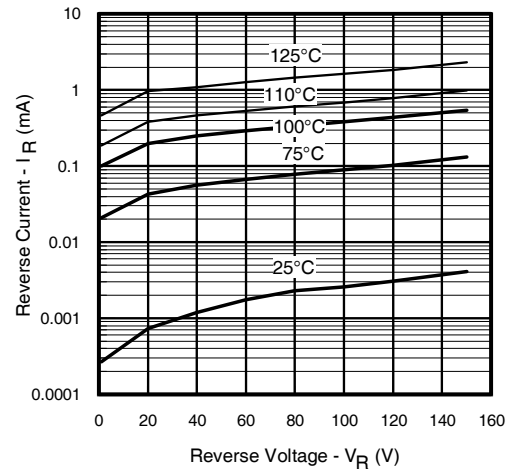


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage (Per Leg)

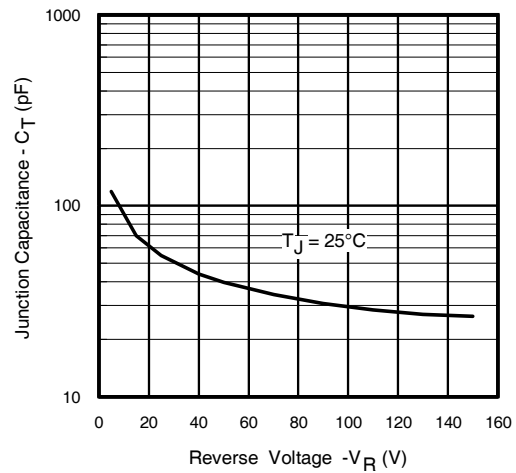
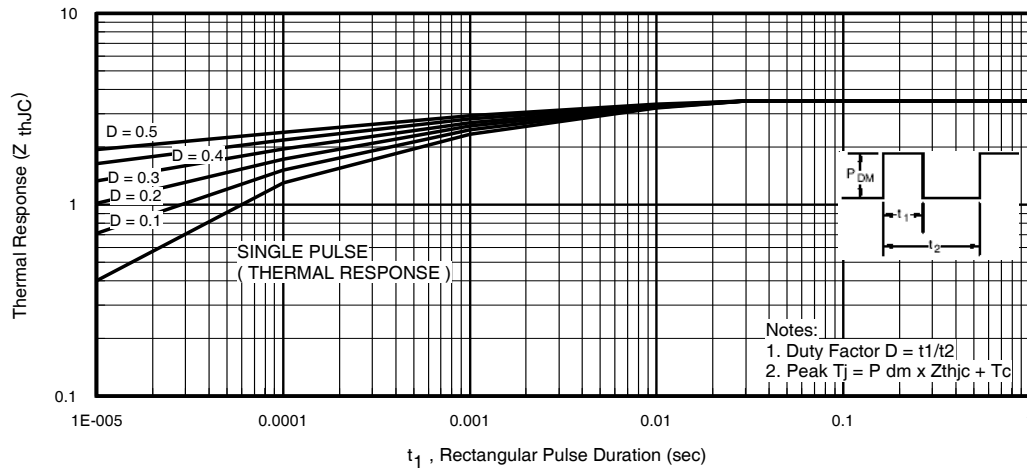
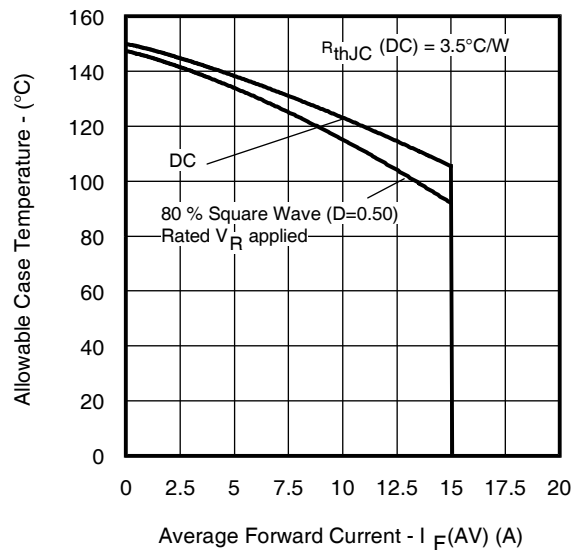


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)Fig. 5 - Max. Allowable Case Temperature Vs.
Average Forward Current (Per Leg)