


13	12	11	10	9	8	7	6	5	4	3	2	1
STRIP MATERIAL NUMBER	LOOSE PIECE MATERIAL NUMBER	AWG SIZE	FINISH		DIM. "A"	DIM. "B"	DIM. "C"	DIM. "D"				
194200001	194200009	16-14	PREPLATED TIN 75 μ MIN THICK OVER NICKEL FLASH		.235/5.97	.182/4.62	.141/3.58	.155/3.94				
194200002	194200010	22-18			.179/4.55	.143/3.63	.114/2.89	.106/2.70				
194200003	194200011	16-14	SELECT HARD GOLD 30 μ MIN. THICK WITH SELECT TIN 100 μ MIN. OVER NICKEL 50 μ MIN. OVERALL		.235/5.97	.182/4.62	.141/3.58	.155/3.94				
194200004	194200012	22-18			.179/4.55	.143/3.63	.114/2.89	.106/2.70				

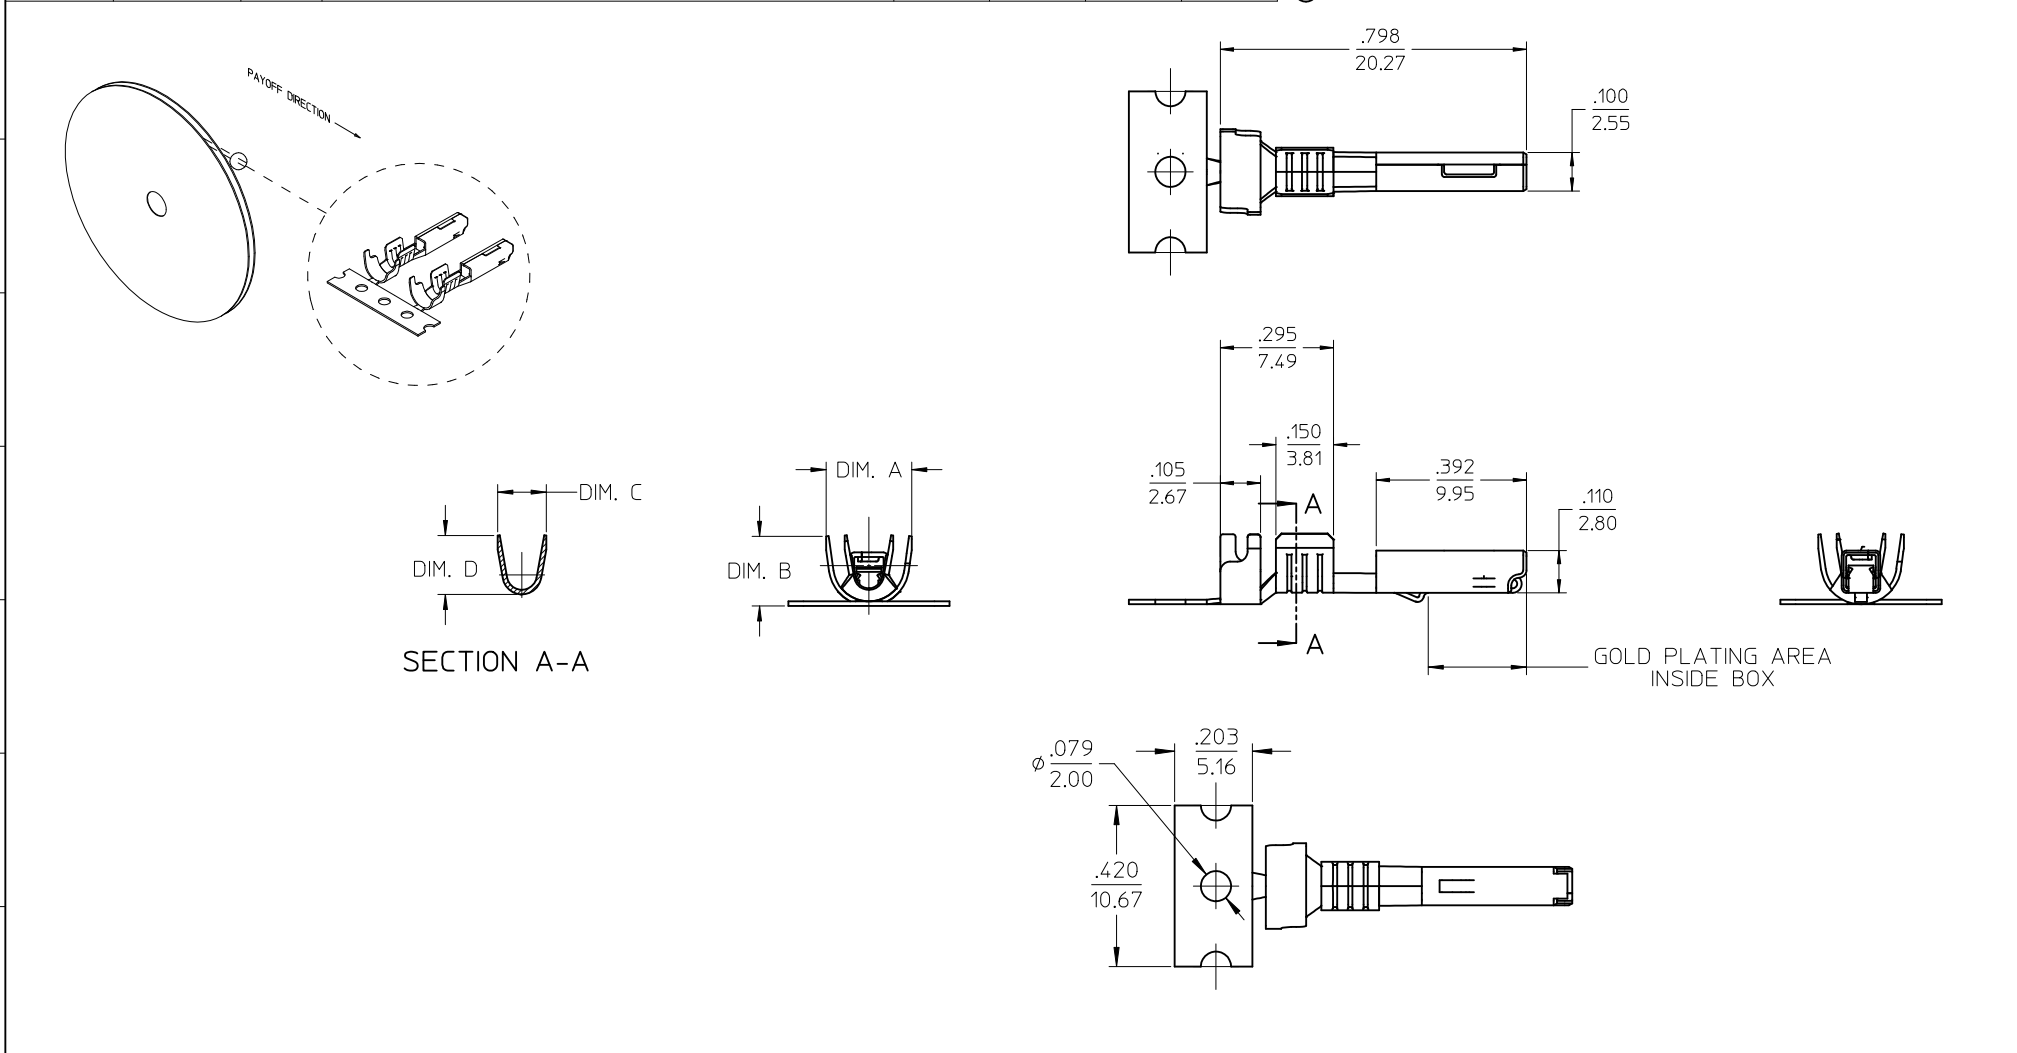

- NOTES:
1. MATERIAL: COPPER ALLOY .0098/0.249 THK.
 2. FINISH: SEE CHART.
 3. TERMINALS FOR USE WITH 19418-**** RECEPTACLE HOUSING ASSEMBLY.
 4. STRIP TERMINALS ARE REELED AS SHOWN ABOVE ON 24" REELS, 4000 PARTS PER REEL.
 5. LOOSE TERMINALS ARE BULK PACKAGED IN QUANTITIES OF 400.
 6. APPLICATION TOOLING AND CRIMP SPECIFICATIONS: 63865-6200 (14-16 AWG), 63865-6300 (14-16 AWG), 63811-4000 (HAND TOOL).

CORRECT DIM "C" EC NO: WNA2012-0240 DRAWN/REV: 2011/11/03 CHKD: APPR:DTT/TUS 2011/11/18	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 4:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION				
				mm	INCH	DRAWN BY JPAWLICK	DATE 05/05/03	TITLE FEMALE RECEPTACLE TERMINAL, 22-18 & 16-14 AWG, .059/1.50X.031/0.79  MOLEX INCORPORATED						
			4 PLACES	± ---	± ---	CHECKED BY JPAWLICK	DATE 05/05/03							
			3 PLACES	± ---	±.010									
			2 PLACES	± 0.25	±.02									
			1 PLACE	± 0.5	± ---	APPROVED BY RDEROSS	DATE 05/05/03							
			ANGULAR ± 3 °			MATERIAL NO.						DOCUMENT NO.		SHEET NO.
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE C						SD-19420-001		1 OF 1
			SEE CHART											
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											