
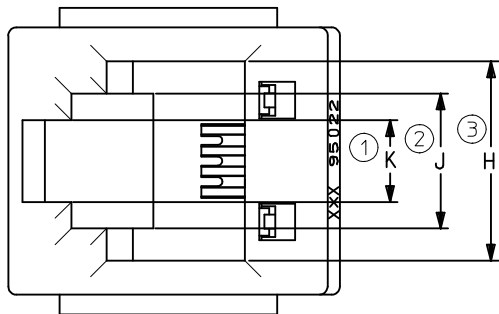



VERSION WITHOUT RIBS



NOTES :

1- MATERIAL:

-HOUSING: LCP FIBER GLASS FILLED 94-V-0 COLOR BLACK.

-TERMINAL: COPPER ALLOY PLATED WITH:

BASE FINISH: NICKEL

CONTACT SURFACE FINISH:

GOLD

OR

GOLD FLASH OVER PALLADIUM NICKEL

EXCEEDS PRODUCT REQUIREMENTS BASED ON PS-95522-002

2- PC BOARD THICKNESS : 1.57

3- JACK FOR MATING WITH IEC 60603-7 AND TIA-1096-A PLUGS
90075 MOLEX SERIES .

4- PRODUCT SPECIFICATION PS-95522-002.


5- APPLICATION SPECIFICATION AS-85513-001

6- PACKAGING SPECIFICATION PK-95022. (SHT.1 TRAY PACKAGING)
PK-95022. (SHT.2 TUBE PACKAGING)

7- FOR ILLUSTRATION PURPOSES A 4 CIRCUIT IS SHOWN.

8- MANUFACTURING I.D. CAN BE EITHER MG, MXF OR MXI.

LAST INSPECTION NUMBER: 19


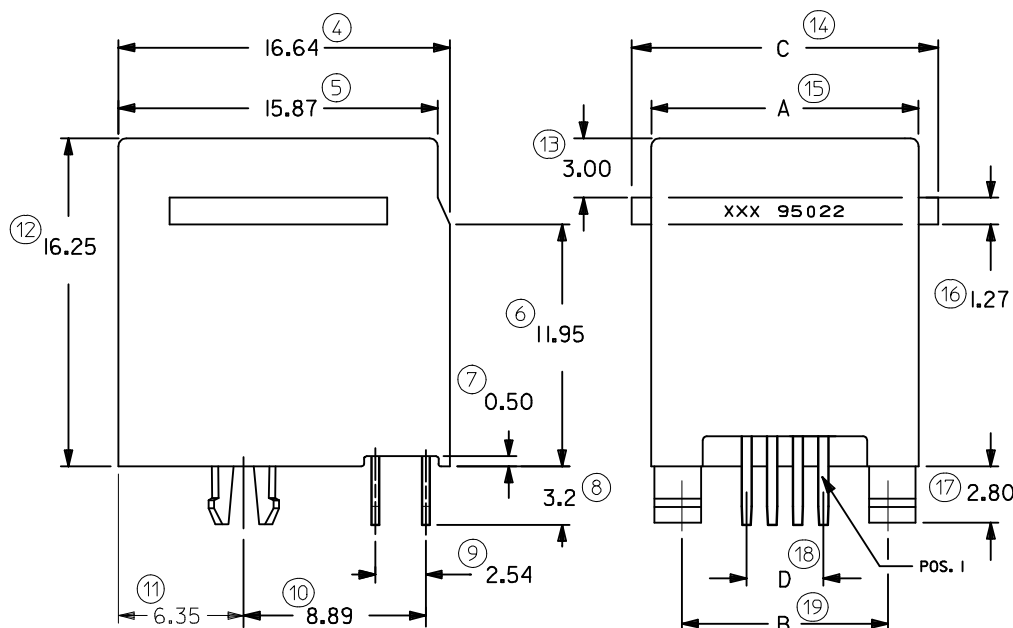




CORRECTED PRODUCT SPEC	REV	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	HIGH PROFILE TOP ENTRY JACK	MOLEX INCORPORATED	DOCUMENT NO. SD-95522-001	SHEET NO. 1 OF 2
				mm	INCH	DRAWN BY	DATE							

CORRECTED PRODUCT SPEC	REV	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	HIGH PROFILE TOP ENTRY JACK	MOLEX INCORPORATED	DOCUMENT NO. SD-95522-001	SHEET NO. 1 OF 2
				mm	INCH	DRAWN BY	DATE							

CORRECTED PRODUCT SPEC	REV	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	HIGH PROFILE TOP ENTRY JACK	MOLEX INCORPORATED	DOCUMENT NO. SD-95522-001	SHEET NO. 1 OF 2
				mm	INCH	DRAWN BY	DATE							


CORRECTED PRODUCT SPEC	REV	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	HIGH PROFILE TOP ENTRY JACK	MOLEX INCORPORATED	DOCUMENT NO. SD-95522-001	SHEET NO. 1 OF 2
				mm	INCH	DRAWN BY	DATE							

PART NUMBERS FOR JACK WITH RIBS									
	TYPE	PACKAGING	POS. 4	TOOLED	POS. 6	TOOLED	POS. 6	TOOLED	POS. 8
			4 CKTS.		4 CKTS.		6 CKTS.		8 CKTS.
			TRAY	95522-2447	X	95522-2647	X	95522-2667	X 95522-2887
	TYPE	PACKAGING	POS. 4	TOOLED	POS. 6	TOOLED	POS. 6	TOOLED	POS. 8
			TUBE				95522-2617	X	95522-2881

PART NUMBERS FOR JACK WITHOUT RIBS									
	TYPE	PACKAGING	POS. 4	TOOLED	POS. 6	TOOLED	POS. 6	TOOLED	POS. 8
			4 CKTS.		4 CKTS.		6 CKTS.		8 CKTS.
			TRAY	95522-2441	X	95522-2641	X	95522-2661	X 95522-2881
	TYPE	PACKAGING	POS. 4	TOOLED	POS. 6	TOOLED	POS. 6	TOOLED	POS. 8
			TUBE				95522-2611	X	95522-2881

DIM. \ TYPE	POS. 4	POS. 6		POS. 8
	4 CKTS.	4 CKTS.	6 CKTS.	8 CKTS.
A	11.18	13.21	13.21	15.24
B	7.62	10.16	10.16	11.43
C (WITH RIBS)	14.00	16.00	16.00	18.00
D	3.81	3.81	6.35	8.89
H	7.82	9.88	9.88	11.94
J	5.64	6.70	6.70	6.30
K	3.07	4.06	4.06	4.06

REMOVED PLATING OPTIONS		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
EC NO: IPG2012-0698		DRWN:DBYRNES		mm		MM ONLY		1:1	METRIC	HIGH PROFILE TOP ENTRY JACK	
2012/04/02		2012/04/17		INCH		DRAWN BY					
CHYD:MSHANAHAN		2012/06/28		4 PLACES ± --- ± ---		DATE		KNOLLER		04/08/27	
APPR:EFOLAN				3 PLACES ± --- ± ---		CHECKED BY		DATE		FCARABET	
				2 PLACES ± 0.25 ± ---		APPROVED BY		DATE		04/08/30	
				1 PLACE ± 0.35 ± ---		KNOLLER		DATE		04/08/30	
				ANGULAR ± 2 °		MATERIAL NO.		DOCUMENT NO.		SD-95522-001	
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SHEET NO.	
						A3				2 OF 2	

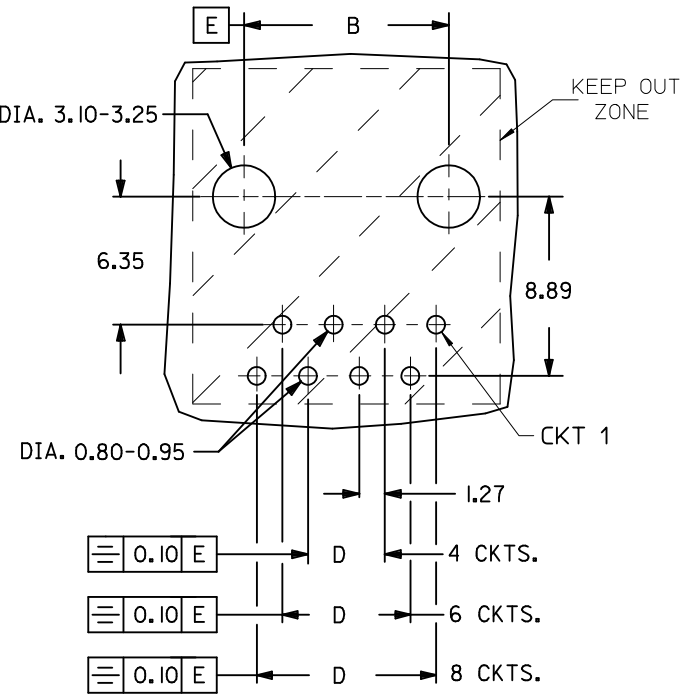

MOUNTING HOLE PATTERNS

(SEE FROM COMPONENT SIDE)

ALL DIMENSIONS REF DIMENSIONS