

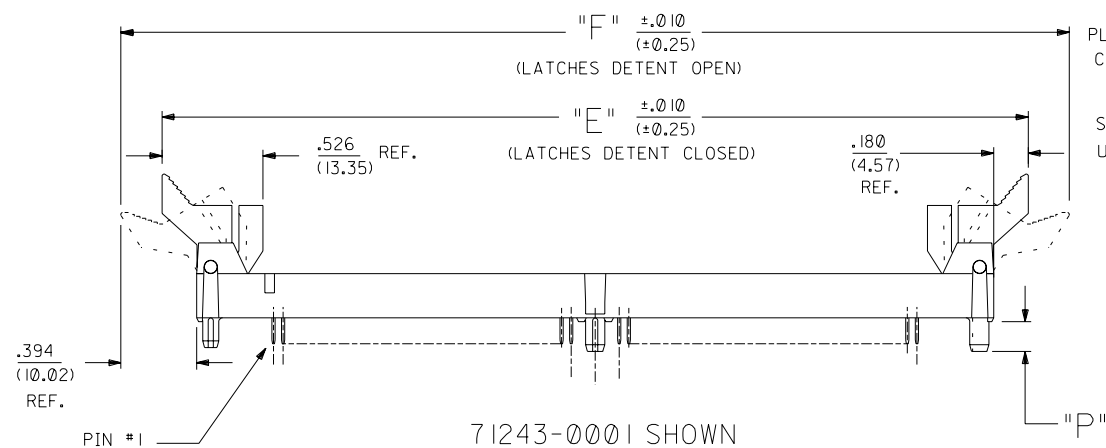


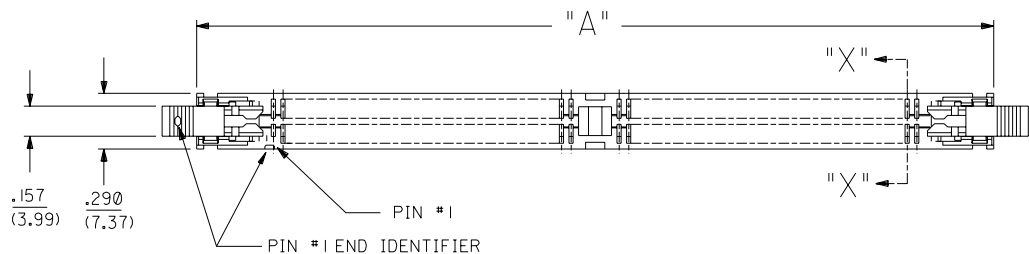

71243-0001 SHOWN

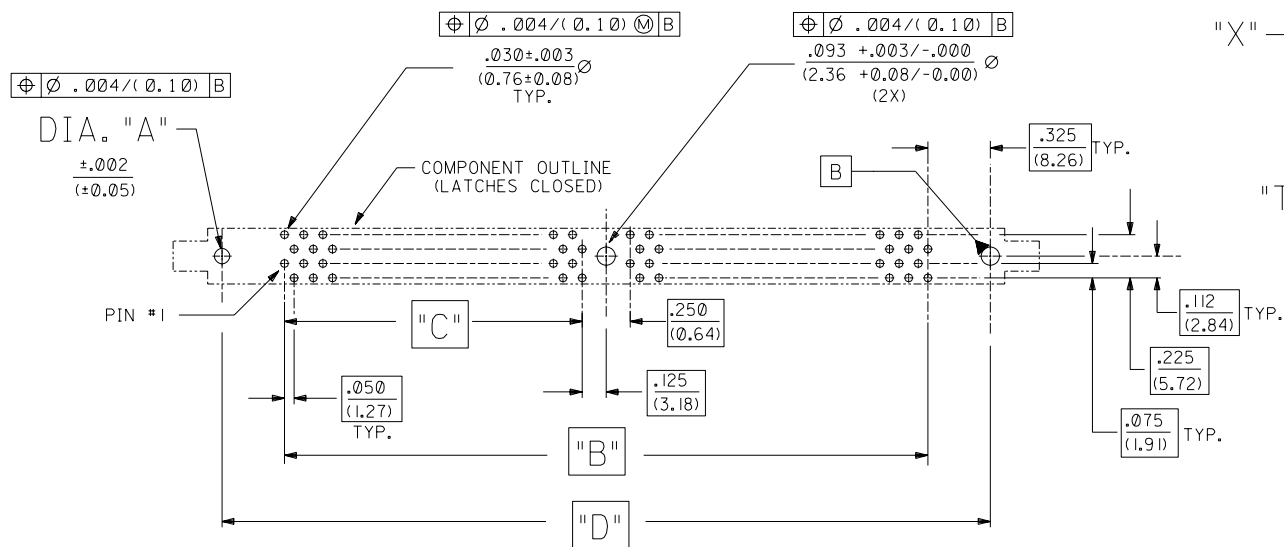

RECOMMENDED
P.C. BOARD HOLE PATTERN
(CONNECTOR SIDE)

NOTES:

- CARD SLOT ACCEPTS .050±.004 (1.27±0.10) MODULE THICKNESS. (MEASURED OVER P.C. PADS).
- ALL PEGS ARE INTERFERENCE FITS TO PCB UNLESS NOTED ON THE DWG.
- REFER TO PRODUCT SPEC PS-71243-9999 FOR PERFORMANCE SPECIFICATIONS.
- PRODUCT IS PACKAGED IN TRAYS.
- RECOMMENDED MODULE LAYOUT SHALL BE PER JEDEC MO-167.
- RECOMMENDED PLATING ON MODULE PADS: 30 MICROINCH/(0.76 MICROMETER) MINIMUM HARD GOLD (Au) OVER 79 MICROINCH/(2.0 MICROMETER) MINIMUM NICKEL (Ni).
- PRODUCT WILL HAVE DATE CODE STAMPED ON SIDE OF HOUSING.

MATERIALS:


HOUSING - GLASS FILLED LIQUID CRYSTAL POLYMER (LCP), UL 94V-0, COLOR: BLACK.
TERMINAL - PHOSPHOR BRONZE
LATCHES - GLASS FILLED HIGH TEMPERATURE NYLON, UL 94V-0.
LATCH AT PIN #1 END IS IVORY COLOR.
LATCH AT OPPOSITE END IS BLACK COLOR.

PLATING:

CONTACT AREA: GOLD (Au) FLASH; THICKNESS=2-10 MICROINCH/(0.05-0.25 MICROMETER), OVER PALLADIUM-NICKEL (Pd-Ni); THICKNESS=30 MICROINCH/(0.76 MICROMETER) MINIMUM.


SOLDER TAILS: TIN (Sn); THICKNESS=150 MICROINCH/(3.81 MICROMETER) MINIMUM.

UNDERPLATE: NICKEL (Ni) OVER ENTIRE CONTACT.



NOTE FOR LEAD FREE CONVERSION:

THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH LEAD.

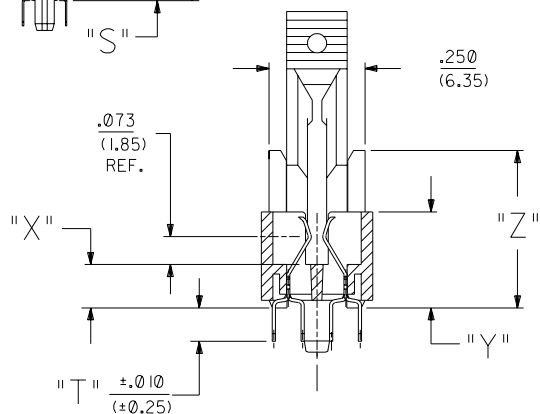

SECTION "X-X"

SCALE 4:1

71243	
G1	ADD LEAD FREE NOTE ECN#UDT2004-1732 DMORGAN 04/03/08
G	OBSOLETE 136 CKT. ECN#UDT2000-0947 DMORGAN 00/03/23
F	CHG Sn-Pb THICKNESS ECN#UDT1999-0454 DMORGAN 99/08/09
E	REVISED PER ECR# U61133 96-10-1 LAURX
D	REVISED PER ECR# U50883 3-18-96 JCL
C	REVISED PER ECR# U50836 1-19-96 JCL
B	REVISED PER ECR# U50617 8-4-95 JCL
A	RMVD X REVISED PER ECR# U50617 12-27-94 JCL
2	REVISED PER ECR# U40711 11-7-94 JCL
1	RELEASED PER ECR# U40711 DCB 10/94
2	G
1	G1
MFG, SH.	REV.
LTR.	REVISIONS

DIMENSIONS SHOWN (METRIC) INCH		UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°	
3 PLACE	± .005	INCH	METRIC
2 PLACE	± .01	± .013	
1 PLACE	---	± 0.25	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			
DRWG. BY	JCL	CHK'D. BY	DCB
APP'D. BY		SCALE	2: 1
FILE NAME		SHEET NO.	
57124301 DGN		1 OF 2 10/10/94	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CP C	

