



**Advanced Power  
Electronics Corp.**


**AP9974GS/P**

**Pb Free Plating Product**

**N-CHANNEL ENHANCEMENT MODE**

**POWER MOSFET**

- ▼ Low Gate Charge
- ▼ Single Drive Requirement
- ▼ Fast Switching Characteristic





|              |              |
|--------------|--------------|
| $BV_{DSS}$   | 60V          |
| $R_{DS(ON)}$ | 12m $\Omega$ |
| $I_D$        | 72A          |

## Description

The Advanced Power MOSFETs from APEC provide the designer with the best combination of fast switching, ruggedized device design, low on-resistance and cost-effectiveness.

The TO-263 package is universally preferred for all commercial-industrial surface mount applications and suited for low voltage applications such as DC/DC converters. The through-hole version (AP9974GP) are available for low-profile applications.

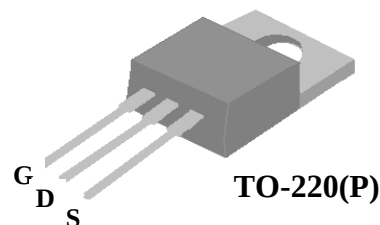

## Absolute Maximum Ratings

| Symbol                 | Parameter                                | Rating     | Units          |
|------------------------|------------------------------------------|------------|----------------|
| $V_{DS}$               | Drain-Source Voltage                     | 60         | V              |
| $V_{GS}$               | Gate-Source Voltage                      | $\pm 20$   | V              |
| $I_D@T_C=25^{\circ}C$  | Continuous Drain Current, $V_{GS}$ @ 10V | 72         | A              |
| $I_D@T_C=100^{\circ}C$ | Continuous Drain Current, $V_{GS}$ @ 10V | 46         | A              |
| $I_{DM}$               | Pulsed Drain Current <sup>1</sup>        | 300        | A              |
| $P_D@T_C=25^{\circ}C$  | Total Power Dissipation                  | 104        | W              |
|                        | Linear Derating Factor                   | 0.8        | W/ $^{\circ}C$ |
| $T_{STG}$              | Storage Temperature Range                | -55 to 150 | $^{\circ}C$    |
| $T_J$                  | Operating Junction Temperature Range     | -55 to 150 | $^{\circ}C$    |

## Thermal Data

| Symbol | Parameter                                | Value | Units         |
|--------|------------------------------------------|-------|---------------|
| Rthj-c | Thermal Resistance Junction-case Max.    | 1.2   | $^{\circ}C/W$ |
| Rthj-a | Thermal Resistance Junction-ambient Max. | 62    | $^{\circ}C/W$ |


**Electrical Characteristics@T<sub>j</sub>=25°C(unless otherwise specified)**

| Symbol                              | Parameter                                            | Test Conditions                                          | Min. | Typ. | Max. | Units |
|-------------------------------------|------------------------------------------------------|----------------------------------------------------------|------|------|------|-------|
| BV <sub>DSS</sub>                   | Drain-Source Breakdown Voltage                       | V <sub>GS</sub> =0V, I <sub>D</sub> =250uA               | 60   | -    | -    | V     |
| ΔBV <sub>DSS</sub> /ΔT <sub>j</sub> | Breakdown Voltage Temperature Coefficient            | Reference to 25°C, I <sub>D</sub> =1mA                   | -    | 0.07 | -    | V/°C  |
| R <sub>DS(ON)</sub>                 | Static Drain-Source On-Resistance <sup>2</sup>       | V <sub>GS</sub> =10V, I <sub>D</sub> =45A                | -    | -    | 12   | mΩ    |
|                                     |                                                      | V <sub>GS</sub> =4.5V, I <sub>D</sub> =30A               | -    | -    | 15   | mΩ    |
| V <sub>GS(th)</sub>                 | Gate Threshold Voltage                               | V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =250uA | 1    | -    | 3    | V     |
| g <sub>fs</sub>                     | Forward Transconductance                             | V <sub>DS</sub> =10V, I <sub>D</sub> =30A                | -    | 50   | -    | S     |
| I <sub>DSS</sub>                    | Drain-Source Leakage Current (T <sub>j</sub> =25°C)  | V <sub>DS</sub> =60V, V <sub>GS</sub> =0V                | -    | -    | 10   | uA    |
|                                     | Drain-Source Leakage Current (T <sub>j</sub> =150°C) | V <sub>DS</sub> =48V, V <sub>GS</sub> =0V                | -    | -    | 100  | uA    |
| I <sub>GSS</sub>                    | Gate-Source Leakage                                  | V <sub>GS</sub> =±20V                                    | -    | -    | ±100 | nA    |
| Q <sub>g</sub>                      | Total Gate Charge <sup>2</sup>                       | I <sub>D</sub> =30A                                      | -    | 43   | 69   | nC    |
| Q <sub>gs</sub>                     | Gate-Source Charge                                   | V <sub>DS</sub> =48V                                     | -    | 8    | -    | nC    |
| Q <sub>gd</sub>                     | Gate-Drain ("Miller") Charge                         | V <sub>GS</sub> =4.5V                                    | -    | 31   | -    | nC    |
| t <sub>d(on)</sub>                  | Turn-on Delay Time <sup>2</sup>                      | V <sub>DS</sub> =30V                                     | -    | 14   | -    | ns    |
| t <sub>r</sub>                      | Rise Time                                            | I <sub>D</sub> =30A                                      | -    | 48   | -    | ns    |
| t <sub>d(off)</sub>                 | Turn-off Delay Time                                  | R <sub>G</sub> =3.3Ω, V <sub>GS</sub> =10V               | -    | 42   | -    | ns    |
| t <sub>f</sub>                      | Fall Time                                            | R <sub>D</sub> =1Ω                                       | -    | 67   | -    | ns    |
| C <sub>iss</sub>                    | Input Capacitance                                    | V <sub>GS</sub> =0V                                      | -    | 3180 | 5100 | pF    |
| C <sub>oss</sub>                    | Output Capacitance                                   | V <sub>DS</sub> =25V                                     | -    | 495  | -    | pF    |
| C <sub>rss</sub>                    | Reverse Transfer Capacitance                         | f=1.0MHz                                                 | -    | 460  | -    | pF    |
| R <sub>g</sub>                      | Gate Resistance                                      | f=1.0MHz                                                 | -    | 1    | 1.5  | Ω     |

**Source-Drain Diode**

| Symbol          | Parameter                       | Test Conditions                           | Min. | Typ. | Max. | Units |
|-----------------|---------------------------------|-------------------------------------------|------|------|------|-------|
| V <sub>SD</sub> | Forward On Voltage <sup>2</sup> | I <sub>S</sub> =45A, V <sub>GS</sub> =0V  | -    | -    | 1.2  | V     |
| t <sub>rr</sub> | Reverse Recovery Time           | I <sub>S</sub> =30A, V <sub>GS</sub> =0V, | -    | 45   | -    | ns    |
| Q <sub>rr</sub> | Reverse Recovery Charge         | dI/dt=100A/μs                             | -    | 40   | -    | nC    |

**Notes:**

- 1.Pulse width limited by Max. junction temperature.
- 2.Pulse width ≤300us , duty cycle ≤2%.

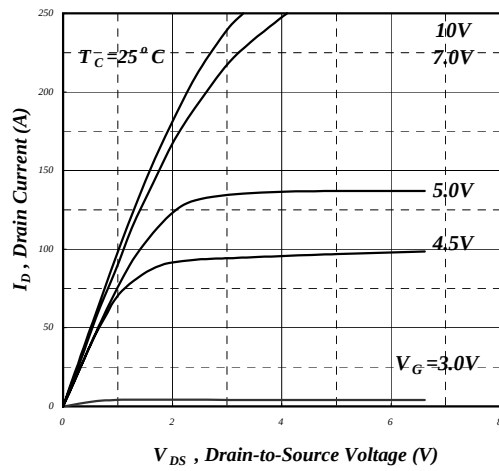


Fig 1. Typical Output Characteristics

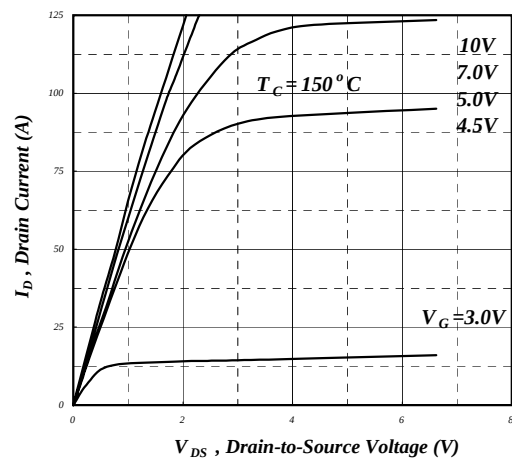


Fig 2. Typical Output Characteristics

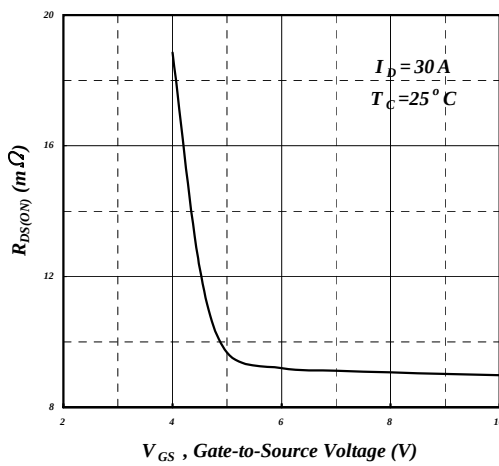


Fig 3. On-Resistance v.s. Gate Voltage

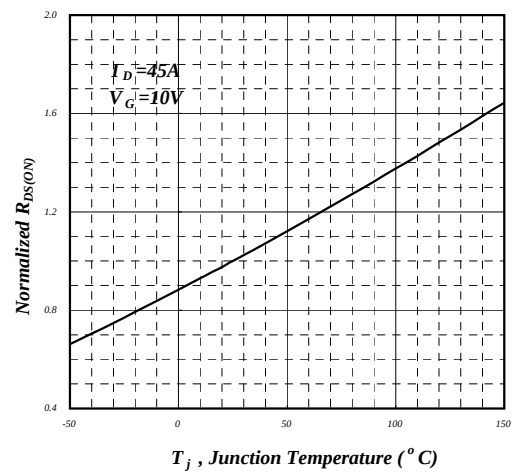


Fig 4. Normalized On-Resistance v.s. Junction Temperature

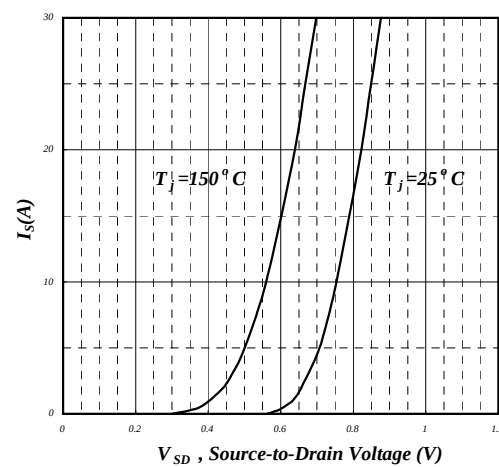


Fig 5. Forward Characteristic of Reverse Diode

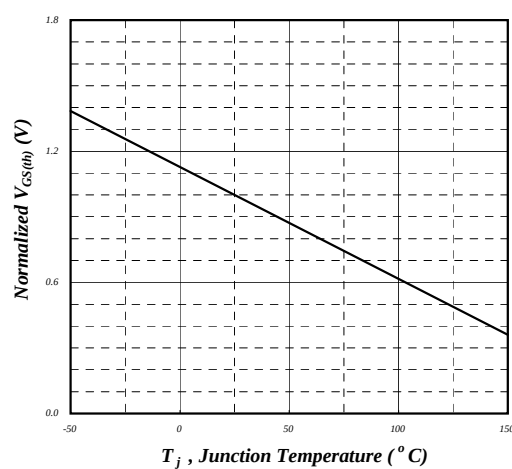


Fig 6. Gate Threshold Voltage v.s. Junction Temperature

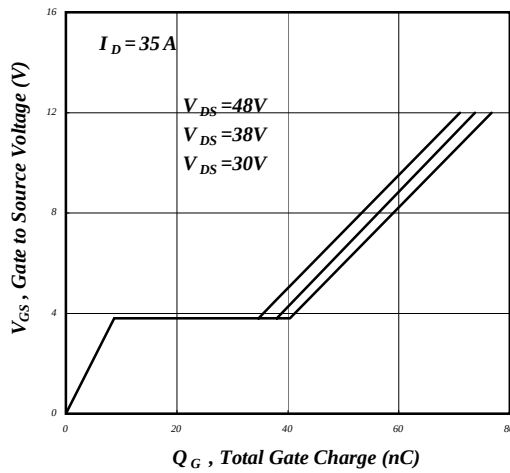


Fig 7. Gate Charge Characteristics

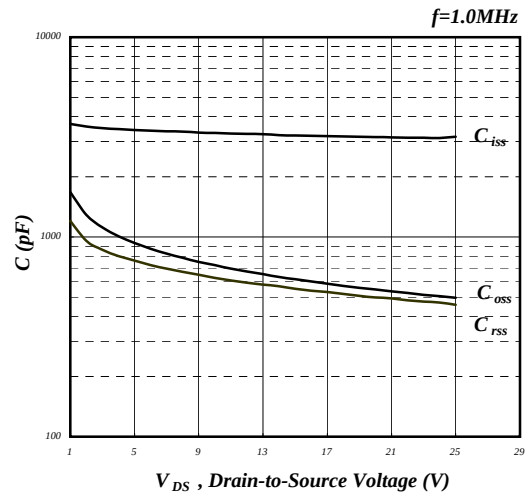


Fig 8. Typical Capacitance Characteristics

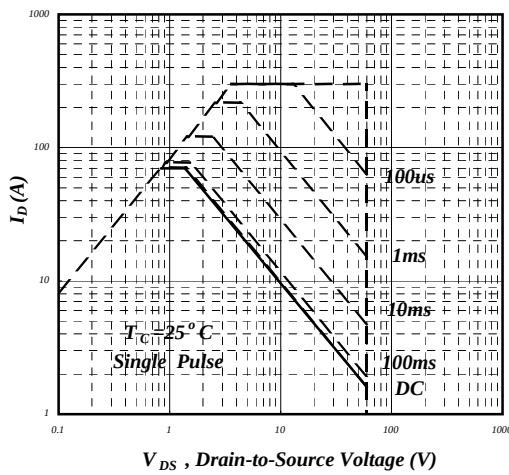


Fig 9. Maximum Safe Operating Area

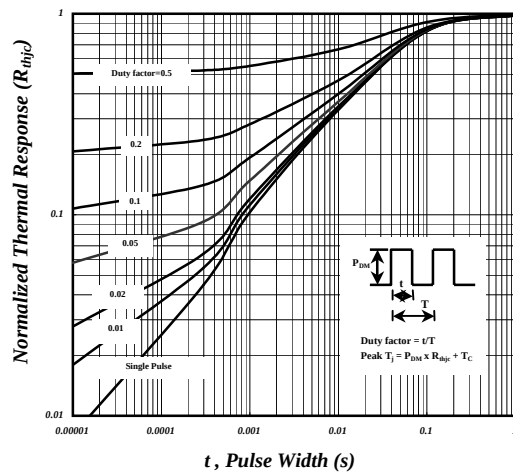


Fig 10. Effective Transient Thermal Impedance

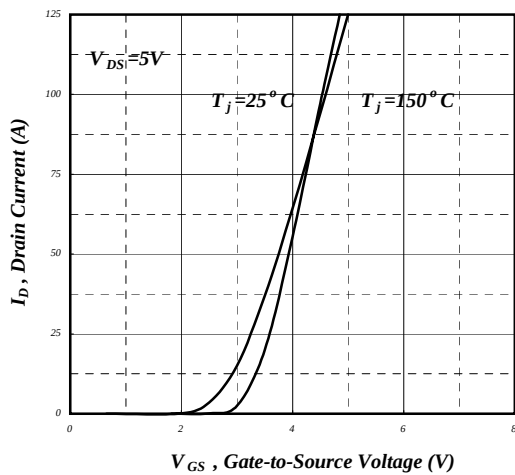


Fig 11. Transfer Characteristics

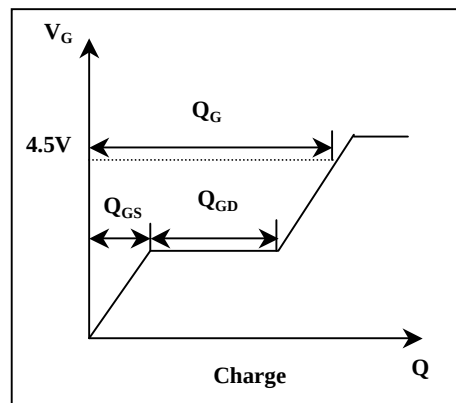


Fig 12. Gate Charge Waveform