




PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			1600	MHz
Upper Frequency:	1850			MHz
Tuning Voltage:	0.25		4.75	VDC
Supply Voltage:	4..25	4.5	4.75	VDC
Output Power:	-2.0	+1.5	+5.0	dBm
Supply Current:		10		mA
Harmonic Suppression (2 nd Harmonic)		-20		dBc
Pushing:			3.0	MHz/V
Pulling, all Phases:			5.0	MHz pk-pk
Tuning Sensitivity:		85		MHz/V
Phase Noise @ 10kHz offset:		-103		dBc/Hz
Phase Noise @ 100kHz offset:		-128		dBc/Hz
Load Impedance:		50		Ω
Input Capacitance:			50	pF
Operating Temperature Range:	-40		+85	$^{\circ}\text{C}$
Storage Temperature Range:	-45		+90	$^{\circ}\text{C}$

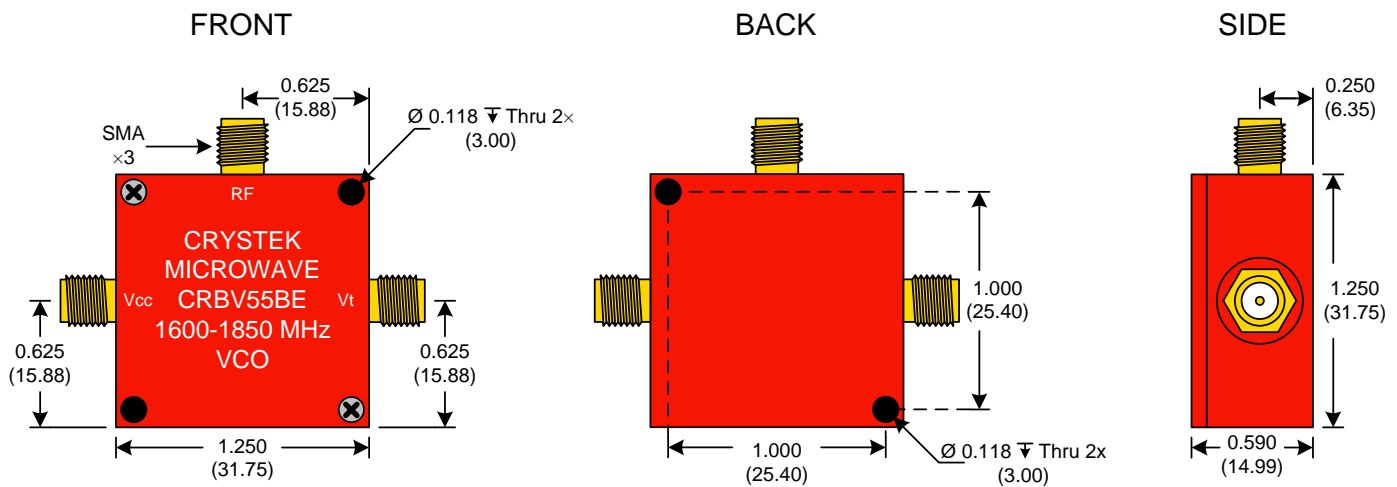

● Unless otherwise specified, Dimensions are in: $\frac{\text{IN}}{\text{mm}}$


Product Control:

Crystek Part Number:	CRBV55BE-1600-1850	Release Date:	18-Mar-09
Revision Level:	A	Responsible:	C. Vales






Phase Noise (1 Hz BW, Typical)

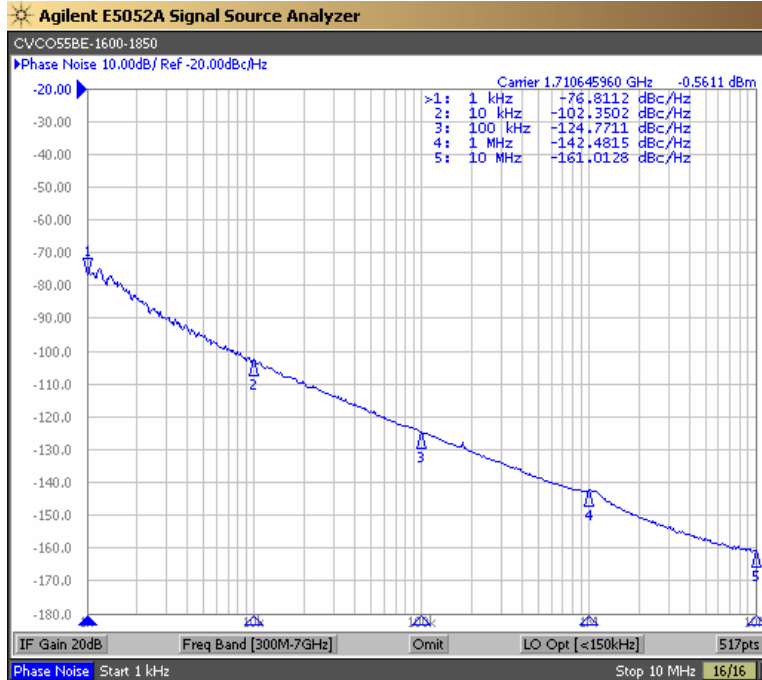

Tuning Curve (Typical)

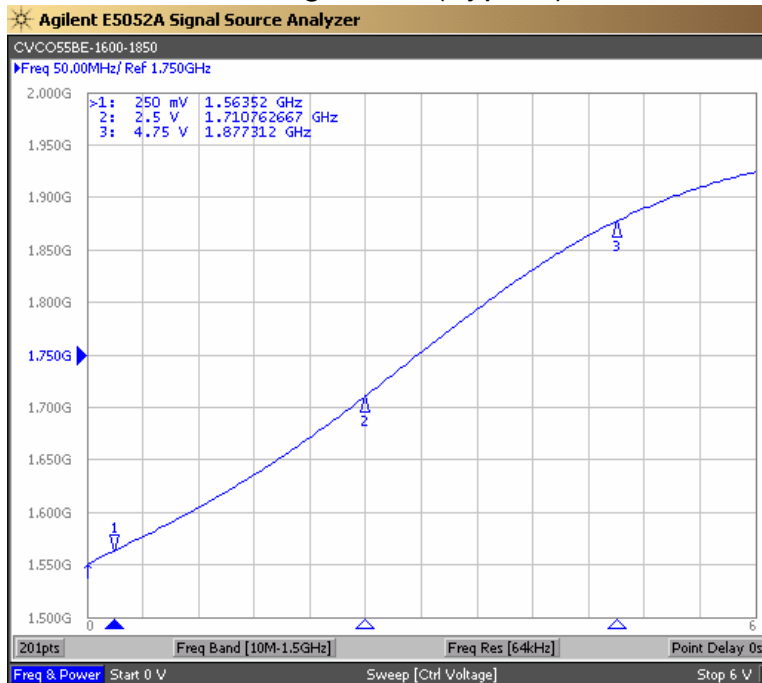

Product Control:

Crystek Part Number:	CRBV55BE-1600-1850	Release Date:	18-Mar-09
Revision Level:	A	Responsible:	C. Vales

Specification is subject to change without notice

